

PCT/IL 00 / 00 439

13 SEP 2000

IL00

00439

REC'D 25 SEP 2000

PO

PCT

PA 292857

# THE UNITED STATES OF AMERICA

TO ALL TO WHOM THESE PRESENTS SHALL COME:

UNITED STATES DEPARTMENT OF COMMERCE

United States Patent and Trademark Office

September 05, 2000

10/049269

THIS IS TO CERTIFY THAT ANNEXED HERETO IS A TRUE COPY FROM THE RECORDS OF THE UNITED STATES PATENT AND TRADEMARK OFFICE OF THOSE PAPERS OF THE BELOW IDENTIFIED PATENT APPLICATION THAT MET THE REQUIREMENTS TO BE GRANTED A FILING DATE UNDER 35 USC 111.

APPLICATION NUMBER: 09/372,578

FILING DATE: August 12, 1999

## PRIORITY DOCUMENT

SUBMITTED OR TRANSMITTED IN  
COMPLIANCE WITH RULE 17.1(a) OR (b)



By Authority of the  
COMMISSIONER OF PATENTS AND TRADEMARKS

*T. Lawrence*

T. LAWRENCE  
Certifying Officer

THE COMMISSIONER OF PATENTS AND TRADEMARKS  
WASHINGTON, D.C. 20231

Case Docket No.: 15793

Sir,

Transmitted herewith for filing is the patent application of

Inventor: GILLEVY ET AL

For: FINGER GUIDED SURGICAL INSTRUMENT

Enclosed are:

- ☒ 15 sheets of informal drawing(s).
- ☒ An assignment of the invention to URGGYN LTD.
- ☐ A certified copy of a \_\_\_\_\_ application.
- ☐ An associate power of attorney.
- ☒ A verified statement to establish small entity status under 37 CFR 1.9 and 37 CFR 1.27.
- ☐ Other \_\_\_\_\_

The filing fee has been calculated as shown below:

FOR	(Col.1)	(Col.2)
	NO FILED	NO EXTRA
BASIC FEE		
TOTAL CLAIMS	98 - 20 =	78
INDEP CLAIMS	18 - 3 =	15
Record of Assignment		40

\* If the difference in Col.1 is less than zero, enter "0" in Col.2

SMALL ENTITY	
RATE	FEE
	\$ 380
78 x 9 =	\$ 702
15 x 39 =	\$ 585
	\$ 40
TOTAL	\$ 1611

OTHER THAN A SMALL ENTITY	
RATE	FEE
	\$ 760
x18 =	\$
x78 =	\$
	\$
TOTAL	\$

- ☐ Please charge my Deposit Account No. 06-2140 in the amount of \$ 1611. A duplicate copy of this sheet is enclosed.
- ☐ A check in the amount of \$\_\_\_\_\_ to cover the filing fee is enclosed.
- ☒ The Commissioner is hereby authorized to charge payment of the following fees associated with this communication or credit any overpayment to Deposit Account No. 06-2140. A duplicate copy of this sheet is enclosed.
- ☒ Any additional filing fees required under 37 CFR 1.16
- ☒ Any patent application processing fees under 37 CFR 1.17.
- ☒ The Commissioner is hereby authorized to charge payment of the following fees during the pendency of this application or credit any overpayment to Deposit Account No. 06-2140. A duplicate copy of this sheet is enclosed.
- ☒ Any patent application processing fees under 37 CFR 1.17
- ☐ The issue fee set in 37 CFR 1.18 at or before mailing of the Notice of allowance, pursuant to 37 CFR 1.311(b)
- ☒ Any filing fees under 37 CFR 1.16 for presentation of extra claims.

Respectfully,

Mark M. Friedman  
Reg. No. 33,883

Mark M. Friedman  
DR. MARK FRIEDMAN LTD  
C/O Anthony Castagna  
2041 Jefferson Davis Highway  
Suite 207  
Arlington, Virginia 22202

15503 U.S. PTO  
09/372578

08/12/99

08/12/99  
15503 U.S. PTO

09372578-081299

## APPLICATION FOR PATENT

5

---

Inventors: Gil Levy and Moshe Maroko

---

10

Title: FINGER-GUIDED SURGICAL INSTRUMENT

15

This is a continuation-in-part of PCT/IL99/00084.

20

FIELD AND BACKGROUND OF THE INVENTION

The present invention relates to surgical instruments, and more particularly, to finger-guided surgical instruments, for performing extra as well as intrabody surgical tasks, such as, but not limited to, cutting, grasping, suturing, sample collection by capillary forces or aspiration, placement of anchors and the like, especially in body locations of limited minimal-invasive accessibility. The present invention further relates to surgical procedures in which one or more finger-guided surgical instrument of the present invention are used to cut, grasp, suture, collect a sample, place anchors and the like, especially in body locations of limited minimal-invasive accessibility.

09372578.081299

For years, there has been a discernible, clear tendency in surgery and invasive diagnosis, especially, but not exclusively, in abdominal, joint, vaginal, in-utero and brain, surgeries or diagnoses, to develop procedures that would reduce the need for major access-providing incisions with their concomitant requirements of general anesthesia, extended hospitalization and increased infection hazard. One step in this direction was the introduction of endoscopy and laparoscopy, which, through provision of minimal incision in, e.g., the abdominal wall of joint covering skin, permits the introduction into the abdominal cavity or joint of a miniature television camera including a light source, as well as of various surgical instruments.

PCT/US97/11494 teaches a number of surgical instruments which can be mounted directly on a surgeon's fingertips in a way that the surgeon can insert his or her hand into the patient through a minimal incision to perform surgical procedures, and also to use his or her fingers to manipulate tissues, thus enabling the surgeon to perform the procedures with the benefits of minimally invasive surgery, but with much greater tactile sense, control, and ease of manipulation. However, these surgical instruments (i) are carried by a finger and operated by the

09372578.001299



thumb, thereby are not applicable for procedures in which a single finger is employed for tactile sensing an operated intrabody location; (ii) ~~include an operating head which permanently extends far beyond the~~ fingertip on which the surgical instrument is mounted, which limits the tactile sensing of the surgeon; and/or (iii) prevent tactile sensing by the instrument carrying fingertip altogether.

Several surgical procedures are performed while the surgeon uses tactile information collected by a single fingertip for tactile sensing the intrabody site to be surgically operated prior to the actual surgical operation. Several non-limiting examples of such procedures are described in detail in the sections that follow. However, once the surgeon has collected the tactile information, surgical instruments are to be blindly operated intrabodily. Such instruments, in most part, engage both the hands of the surgeon. Evidently, blindly operating surgical instruments intrabodily based on finger tip tactile information collected earlier may prove inconvenient, inaccurate and may increase the chance of inadvertently harming the patient.

There is thus a widely recognized need for, and it would be highly advantageous to have, finger-guided surgical instruments devoid of the

00372578-001299  
662180-275260

limitations associated with the prior art instruments and which enable a surgeon to use a single finger to both collect tactile information from an intrabody location to be surgically operated and to surgically operate that intrabody location with a finger-guided surgical instrument.

#### SUMMARY OF THE INVENTION

According to one aspect of the present invention there is provided a finger-mounted device for guiding a surgical instrument, the device comprising a thimble-like element being adapted to surround at least a portion of a surgeon's finger while at least partially exposing the ventral tactile portions of the distal phalanx thereof, so as to enable the surgeon to tactile sense a body location to be treated, the thimble-like element being formed with at least one longitudinal guiding tunnel formed within a wall thereof, the at least one longitudinal guiding tunnel being for guiding the surgical instrument therethrough, so as to enable the surgeon to operate the body location.

According to another aspect of the present invention there is provided a finger-guided surgical instrument, comprising (a) a thimble-

09372578.001299

like element being adapted to surround at least a portion of a surgeon's finger while at least partially exposing the ventral tactile portions of the distal phalanx thereof, so as to enable the surgeon to tactile sense a body

location to be treated; (b) an ejectable surgical tool being engaged within a housing being formed within, or connected to, a wall of the thimble-like element; and (c) a mechanism for ejecting the surgical tool from the thimble-like element, so as to enable the surgeon to operate the body location.

According to further features in preferred embodiments of the invention described below, the finger-mounted device for guiding a surgical instrument and/or the finger-guided surgical instrument of claim 1, further comprising an adapter insertable between the thimble-like element and the surgeon's finger, so as to adapt the guided surgical instrument to fingers of different size.

According to still further features in the described preferred embodiments the mechanism includes a first portion engaged within the housing and which is in contact with the ejectable surgical tool and a second, remote, portion extending out of the patient's body and which is

09372578-001299

operable by a free hand of the surgeon so as to eject the surgical tool from the thimble-like element.

According to still further features in the described preferred

embodiments the mechanism includes a ratchet member disposed  
5 between the thimble-like element and the surgeon's finger so as to eject the surgical tool from the thimble-like element by twisting back and forth the surgeon's finger.

According to still further features in the described preferred  
embodiments the mechanism further serves for withdrawing the ejectable  
10 surgical tool back into the housing.

According to still further features in the described preferred  
embodiments the wall is a side wall of the thimble-like element.

According to still further features in the described preferred  
embodiments the wall is a front wall of the thimble-like element.

15 According to still further features in the described preferred  
embodiments the thimble-like element is constructed so as to be mounted over a dorsal side of the distal phalanx of the surgeon's finger, thereby exposing the entire ventral tactile portions of the distal phalanx.

09372578.081299

According to still further features in the described preferred embodiments the thimble-like element is constructed so as to fully surround the distal phalanx and expose the tip of the ventral tactile portion of the distal phalanx.

3 According to still further features in the described preferred embodiments the thimble-like element is constructed so as to be mounted over a ventral side of the distal phalanx of the surgeon's finger and expose the tip of the ventral tactile portion of the distal phalanx.

According to still further features in the described preferred  
10 embodiments the surgical tool is ejectable in a direction generally in extension of a longitudinal axis of the thimble like element.

According to still further features in the described preferred embodiments the surgical tool is ejectable in a circular path.

According to still further features in the described preferred  
15 embodiments the circular path on a plane which substantially parallels a plane traversing the surgeon's finger from top to bottom.

According to still further features in the described preferred embodiments the circular path on a plane which substantially parallels a plane traversing the surgeon's finger from side to side.

09372578.081299

According to still further features in the described preferred embodiments the circular path on a plane which is substantially perpendicular to the longitudinal axis of the surgeon's finger.

According to still further features in the described preferred  
5 embodiments the surgical tool is selected from the group consisting of a surgical needle, a needle carrying a surgical anchor ejectable therefrom, a puncturing device, an injection needle, a capillary, a puncturing capillary,  
a miniaturized surgical grasper, miniaturized surgical scissors, a miniaturized blade and an aspiration capillary.

10 ~~According to still further features in the described preferred~~  
embodiments the finger-mounted device for guiding a surgical instrument and/or the finger-guided surgical instrument, further comprising a reporting mechanism for reporting at least one situation selected from the group consisting of a full ejection of the surgical tool, a  
15 full withdrawal of the surgical tool, a degree of ejection of the surgical tool and a degree of withdrawal of the surgical tool.

According to yet another aspect of the present invention there is provided a finger-guided surgical instrument, comprising (a) a thimble-like element being adapted to surround a portion of a surgeon's finger

09372578.081299

while exposing the ventral tactile portions of the distal phalanx thereof,  
so as to enable the surgeon to tactile sense a body location to be treated;

~~(b) an ejectable substantially semi-circular surgical needle being engaged~~

within a housing being formed within, or connected to, a wall of the  
thimble-like element, the surgical needle being for holding and guiding a  
suture; and (c) a mechanism for ejecting the surgical needle in a circular  
path through an ejection opening in the housing from the thimble-like  
element and thereafter withdrawing the surgical needle back into the  
thimble-like element through a withdrawal opening in the housing, so as

to enable the surgeon to suture the body location.

According to further features in preferred embodiments of the  
invention described below, the finger-guided surgical instrument further  
comprising a suture attached at one end thereof to the substantially semi-  
circular surgical needle.

According to still further features in the described preferred  
embodiments the mechanism includes a substantially semi-circular  
channel formed in the housing and connecting the ejection and  
withdrawal openings and which fully engages the substantially semi-  
circular surgical needle before its ejection and following its withdrawal,

09372578-081299

so as to direct the substantially semi-circular surgical needle in the circular path around a virtual axis, the mechanism further includes a

~~remotely-treated rotating arm being in the housing and rotatable about a~~

hinge, the rotating arm is designed to eject the substantially semi-circular

5 surgical needle through the ejection opening by pushing a rear portion of the substantially semi-circular surgical needle and the rotating arm is further designed to withdraw the substantially semi-circular surgical needle through the withdrawal opening by pulling a front portion of the substantially semi-circular surgical needle.

10 According to still further features in the described preferred embodiments the virtual axis and the hinge are co-positioned.

According to still further features in the described preferred embodiments the virtual axis and the hinge are offset, whereas the rotating arm is an extendible-retractable arm.

15 According to still further features in the described preferred embodiments the substantially semi-circular surgical needle is formed with a notch at the front portion, the notch is designed to accept a distal end of the rotating arm.

09372578.081299



According to still further features in the described preferred embodiments the substantially semi-circular surgical needle is formed with a notch at the rear portion, the notch is designed to accept a distal end of the rotating arm.

5 According to still further features in the described preferred embodiments the substantially semi-circular surgical needle is formed with a blunt rear end, the rear end is designed to be pushed by the rotating arm.

According to still further features in the described preferred  
10 ~~embodiments the wall is a side wall of the thimble-like element.~~

According to still further features in the described preferred embodiments the wall is a front wall of the thimble-like element.

According to still further features in the described preferred  
15 ~~embodiments the remotely treated rotating arm includes a rotating wheel~~  
portion rotatable about the hinge and an arm portion connected to, or integrally formed with, the rotating wheel portion, the mechanism further includes a remote rotation relay for relaying rotary motion from a remote rotatable actuator to the rotating wheel for effecting rotation of the rotating arm.

09372578-081299

According to still further features in the described preferred embodiments the finger-guided surgical instrument further comprising a flexible tube connecting between the housing and the remote rotatable actuator, the tube engaging the remote rotation relay.

5 According to still further features in the described preferred embodiments the thimble-like element is constructed so as to be mounted over a dorsal side of the distal phalanx of the surgeon's finger, thereby exposing the entire ventral tactile portions of the distal phalanx.

According to still further features in the described preferred  
10 embodiments the circular path on a plane which substantially parallels a plane traversing the surgeon's finger from top to bottom.

According to still further features in the described preferred embodiments the circular path on a plane which substantially parallels a plane traversing the surgeon's finger from side to side.

15 According to still further features in the described preferred embodiments the circular path on a plane which is substantially perpendicular to the longitudinal axis of the surgeon's finger.

According to still further features in the described preferred embodiments the finger-guided surgical instrument further comprising a

09372578.081299

reporting mechanism for reporting at least one situation selected from the group consisting of a full ejection of the substantially semi-circular surgical needle, a full withdrawal of the substantially semi-circular

surgical needle, a degree of ejection of the substantially semi-circular surgical needle and a degree of withdrawal of the substantially semi-circular surgical needle.

According to still another aspect of the present invention there is provided a finger-guided surgical instrument, comprising (a) a thimble-like element being adapted to surround at least a portion of a surgeon's finger while at least partially exposing the ventral tactile portions of the distal phalanx thereof, so as to enable the surgeon to tactile sense a body location to be treated; (b) an ejectable capillary being engaged within a housing being formed in a wall of the thimble-like element; and (c) a first mechanism for ejecting the ejectable capillary from the thimble-like element, so as to enable the surgeon to capillary sample the body location.

According to further features in preferred embodiments of the invention described below, the finger-guided surgical instrument further comprising (d) a translatable ejectable sleeve being engaged within the

09372578.081299

housing surrounding the ejectable capillary; and (e) a second mechanism for ejecting the translatably ejectable sleeve from the thimble-like element, so as to shield the body location from surrounding body fluids.

According to still further features in the described preferred  
5 embodiments the finger-guided surgical instrument further comprising  
(d) an ejectable puncturing device being engaged within the housing, the first mechanism further serves for ejecting the ejectable puncturing device from the thimble-like element, so as to enable the surgeon to wound the body location.

10 According to still further features in the described preferred  
embodiments the ejectable capillary has sharp edges so as to enable the surgeon to wound the body location.

According to still further features in the described preferred  
embodiments the ejectable capillary is a translatably ejectable capillary,  
15 whereas the first mechanism in a remotely treated translatably ejection mechanism.

According to still further features in the described preferred  
embodiments the ejectable capillary is a rotatably-translatably ejectable

09372578.001299

capillary, whereas the first mechanism in a rotatable-remotely treated translatable ejection mechanism.

According to still further features in the described preferred embodiments the ejectable capillary is an ejectable aspiration capillary, 5 the finger-guided surgical instrument further comprising a remote aspirating device being in fluid communication with the ejectable aspiration capillary.

According to still further features in the described preferred embodiments the first mechanism further serves for withdrawing the 10 ejectable capillary back into the housing.

According to still further features in the described preferred embodiments the wall is a back wall of the thimble-like element.

According to still further features in the described preferred embodiments the thimble-like element is constructed so as to be mounted 15 over a ventral side of the distal phalanx of the surgeon's finger, thereby exposing the tip of the ventral tactile portion of the distal phalanx, underneath the nail

09372578-081299

According to still further features in the described preferred embodiments the capillary is ejectable in a direction generally in extension of a longitudinal axis of the thimble like element

According to still further features in the described preferred  
5 embodiments the finger-guided surgical instrument further comprising a reporting mechanism for reporting at least one situation selected from the group consisting of a full ejection of the capillary, a full withdrawal of the capillary, a degree of ejection of the capillary and a degree of withdrawal of the capillary.

10 ~~According to still further features in the described preferred~~  
embodiments the finger-guided surgical instrument further comprising an optical head engaged by the thimble like element.

According to still further features in the described preferred  
embodiments the finger-guided surgical instrument further comprising a  
15 reporting mechanism in the capillary for reporting to the surgeon of at least one situation selected from the group consisting of a presence of fluid in the capillary and a level of fluid in the capillary.

According to an additional aspect of the present invention there is provided a finger-guided surgical instrument, comprising (a) a thimble-

09372578.081299

like element being adapted to surround at least a portion of a surgeon's finger while at least partially exposing the ventral tactile portions of the distal phalanx thereof, so as to enable the surgeon to tactile sense a body

location to be treated; (b) at least one ejectable anchor guiding element being engaged within at least one housing being formed within, or connected to, at least one wall of the thumb-like element; (c) at least one first mechanism for ejecting the at least one anchor guiding element from the thumb-like element, so as to penetrate the body location; (d) at least one ejectable anchor being engaged within the at least one ejectable

10 anchor guiding element; and (e) at least one second mechanism for ejecting the at least one ejectable anchor from within the at least one ejectable anchor guiding element, so as to enable the surgeon to anchor the at least one ejectable anchor in the body location.

According to further features in preferred embodiments of the invention described below, the finger-guided surgical instrument of claim 15 52, further comprising at least one cord attached to the at least one anchor.

09372578.081299

According to still further features in the described preferred  
embodiments the finger-guided surgical instrument further comprising at  
least one cord attached to the at least one anchor.

According to still further features in the described preferred  
5 embodiments the at least one cord is attached to the at least one anchor at  
a position so as to effect rotation and therefore efficient anchorage of the  
anchor when anchored in the body location by pulling on the cord.

According to still further features in the described preferred  
embodiments the at least one first mechanism includes at least one  
10 ~~remotely treated rotating arm being in the housing and rotatable about a~~  
hinge, the at least one remotely treated rotating arm is designed to eject  
the at least one ejectable anchor guiding element through at least one  
ejection opening in the at least one housing by pushing a rear portion of  
the at least one ejectable anchor guiding element, the at least one  
15 remotely treated rotating arm is further designed to withdraw the at least  
one ejectable anchor guiding element by pulling the rear portion of the at  
least one ejectable anchor guiding element in a reverse direction.

According to still further features in the described preferred  
embodiments the at least one second mechanism includes at least one

09372578.081299



remotely treated translatable ejection mechanism for ejecting the at least one anchor from the at least one ejectable anchor guiding element.

According to still further features in the described preferred embodiments the at least one wall is at least one side wall of the thimble-like element

According to still further features in the described preferred embodiments the thimble-like element is constructed so as to be mounted over a dorsal side of the distal phalanx of the surgeon's finger, thereby exposing the entire ventral tactile portions of the distal phalanx.

10 According to still further features in the described preferred embodiments the finger-guided surgical instrument further comprising a reporting mechanism for reporting at least one situation selected from the group consisting of a full ejection of the at least one ejectable anchor, a full ejection of the at least one ejectable anchor guiding element, a full  
15 withdrawal of the at least one ejectable anchor guiding element, a degree of ejection of the at least one ejectable anchor guiding element and a degree of withdrawal of the at least one ejectable anchor guiding element.

09372578.001299

According to still further features in the described preferred embodiments any of the above finger-mounted devices for guiding a surgical instrument and/or the finger-guided surgical instruments, further comprising an optical head engaged by the thimble like element.

According to yet an additional aspect of the present invention there is provided a finger-guided suturing device, comprising (a) a housing in the form of a body provided with a bore, the surface of which is substantially a surface of rotation, the housing being cut along a plane radially offset from an axial plane of the bore by such a distance as to cause the remaining bore to subtend an angle of more than  $180^\circ$ ; (b) a thimble-like member adapted to partially surround, and fit with friction, a surgeon's finger while at least partially exposing the ventral portion of the distal phalanx thereof, the thimble-like member being movable within the housing with one degree of freedom in at least rotation; (c) a surgical needle of substantially semi-circular shape, one end of which constitutes the active point thereof and to the other end of which is fixedly attachable one end of a surgical suture, the needle being adapted to guidedly move in a first guide means of the housing and being further provided with a notch at a location close to the active point; (d) a ratchet member with

09372578.001299

arcuately arranged teeth, fixedly attached to, or integral with, the  
thimble-like member; (e) a needle pusher adapted to guidedly move in a  
second guide means of aid housing and being provided with an

elastically deformable pawl member, whereby the needle pusher is  
5 mechanically coupled to the ratchet member when the latter rotates in  
one sense of rotation, and (f) a needle puller adapted to guidedly move in  
the second guide means of the housing and being provided with an  
elastically deformable pawl member, whereby the needle puller is  
mechanically coupled to the ratchet member when the latter rotates in the

10 ~~one sense of rotation, further comprising a tooth-like projection for~~  
engaging the notch in the needle to facilitate its pulling.

According to further features in preferred embodiments of the  
invention described below, the housing is substantially in the shape of a  
hollow cylinder, part of which has been cut away along a plane radially  
15 offset from an axial plane of the cylinder by such a distance as to cause  
the remaining cylindrical portion to subtend an angle of more than  $180^\circ$ .

According to still further features in the described preferred  
embodiments the first guide means is a first peripheral groove on the  
housing.

09372578.081299

According to still further features in the described preferred embodiments the guide means is a second peripheral groove on the housing.

According to still further features in the described preferred  
5 embodiments the suturing device further comprising a cap contiguously mounted on, and substantially complementing the outer shape of, the housing, the cylindrical inside surface of the cap defining and delimiting the space inside which the needle pusher and the needle puller can move.

According to still further features in the described preferred  
10 embodiments the thimble-like member is provided with at least one

projection matching a peripheral groove inside and housing, whereby the member is constrained to one degree of freedom in rotation only.

According to still further features in the described preferred  
embodiments, in addition to the peripheral inside groove, the housing is  
15 also provided with at least one axially directed inside groove, crossing and extending beyond the peripheral groove, whereby, in at least one angular position relative to the housing, the thimble-like member is also capable of a translational movement against the restoring force of a spring.

09372578.081299

According to still further features in the described preferred embodiments the suturing device, further comprising an exit guide for the needle, mounted at the location where the active point of the needle emerges from the device upon commencement of the suturing process.

5 According to still further features in the described preferred embodiments the suturing device further comprising an entrance guide mounted at the location where the active point of the needle re-enters the device at the conclusion of the suturing process.

According to still an additional aspect of the present invention

10 - there is provided a finger-guided suturing device, comprising a

substantially prismatic housing having a bore, at least part of the length of which is tapering and adapted to partially surround and fit a surgeon's finger with friction while at least partly exposing the ventral portion of the distal phalanx thereof, the housing being cut along a plane distant  
15 from the axis of the bore so that the bore is exposed, but still surrounds the surgeon's finger over more than 180 °, the device further comprising on each side of the prismatic housing (a) a recess having a central hole; and (b) two surgical needles of a substantially semi-circular shape, one end of each needle constituting the active point thereof and the other end

09372578.081299

thereof being fixedly attachable to one end of a surgical suture, the needles being adapted to guidedly move in a groove provided in the recess, each being further provided with a notch at a location close to the

active point, and needle moving means rotatably mounted in each of the  
5 recesses and being rotatable in one sense of rotation by actuating first needle-manipulating means, and in the opposite sense of rotation by actuating second needle-manipulating means.

According to further features in preferred embodiments of the invention described below, the needle-manipulating means are cord  
10 means-actuated by pulling.

According to still further features in the described preferred embodiments the needle moving means comprises needle pusher means advanced by pulling the first cord means and reversed by pulling the second cord means, and needle puller means adapted to guidedly move in  
15 the housing recesses, each comprising catch means for engaging the notch in the needle, as well as pawl means fixedly connected to or integral with the needle puller means, to engage the needle pusher means to effect the return of the needles into the housing.

09372578.081299

According to still further features in the described preferred  
embodiments the needle pusher means and the needle puller means are  
one and the same component.

According to still further features in the described preferred  
5 embodiments the pawl means is fixedly connected to or integrated with  
the needle pusher means.

According to still further features in the described preferred  
embodiments the needle drivers are each provided with drum means, the  
first cord means being wound on each of the drums in one sense of  
10 winding, and the second cord means being wound on each of the drums  
in the opposite sense of winding.

According to still further features in the described preferred  
embodiments the catch means is in the form of a tooth-like projection.

According to another aspect of the present invention there is  
15 provided a surgical procedure for bladder-neck suspension for treatment  
of urinary incontinence, the procedure comprising the step of suspending  
a pelvic fascia and a vaginal wall lateral to a urethra of a patient to  
Cooper's ligament by sutures being placed using a finger-guided surgical  
instrument having an ejectable, substantially semi-circular needle.

09372578.001299

According to yet another aspect of the present invention there is provided a surgical procedure for treatment of recurrent shoulder dislocations, the procedure comprising the step of anchoring at least one anchor holding a cord to a glenoid rim of a patient and engaging a torn anterior-inferior or anterior-medial labrum thereto using the cord, wherein the at least one anchor is anchored in the glenoid rim via an anchor implanting device having at least one ejectable anchor guiding element engaging at least one ejectable anchor therein.

According to still another aspect of the present invention there is provided a surgical procedure for sampling blood from a fetus scalp during labor, the procedure comprising the step of sampling the blood into an ejectable capillary of a finger guided capillary device.

According to an additional aspect of the present invention there is provided a surgical procedure for treatment of rectal prolaps, the procedure comprising the step of constricting an anal opening by sutures being applied by using a finger-guided surgical instrument having an ejectable, substantially semi-circular needle.

According to yet an additional aspect of the present invention there is provided a surgical procedure for treatment of esophageal reflux,

09372578.081299



the procedure comprising the step of positioning a vessel loop around a esophagus of a patient using a finger-guided surgical instrument having an ejectable, substantially semi-circular needle

According to still an additional aspect of the present invention

- 5 here is provided a surgical procedure for treatment of vaginal prolapse, the procedure comprising the step of tying an upper part of a vagina of a patient to a sacrospinous ligament of the patient by sutures being placed using a finger-guided surgical instrument having an ejectable, substantially semi-circular needle.

10 ~~According to a further aspect of the present invention there is~~

provided a surgical procedure for treatment of rupture of a rectum in large animals, the procedure comprising the step of suturing the rupture using a finger-guided surgical instrument having an ejectable, substantially semi-circular needle.

- 15 According to yet a further aspect of the present invention there is provided a surgical procedure for treatment of rupture of a cervix in large animals, the procedure comprising the step of suturing the rupture using a finger-guided surgical instrument having an ejectable, substantially semi-circular needle.

09372578.081299

According to still a further aspect of the present invention there is provided a surgical procedure for treatment of rupture of a uterus in large animals, the procedure comprising the step of suturing the rupture using a finger-guided surgical instrument having an ejectable, substantially semi-

5 circular needle.

The present invention successfully addresses the shortcomings of the presently known configurations by providing finger guided surgical instruments having ejectable surgical tools and finger mounted devices for guiding surgical instruments, which maintains the user finger's ability

10 for palpation.

#### BRIEF DESCRIPTION OF THE DRAWINGS

The invention is herein described, by way of example only, with

15 reference to the accompanying drawings. With specific reference now to the drawings in detail, it is stressed that the particulars shown are by way of example and for purposes of illustrative discussion of the preferred embodiments of the present invention only, and are presented in the cause of providing what is believed to be the most useful and readily

09372578.081299

understood description of the principles and conceptual aspects of the invention. In this regard, no attempt is made to show structural details of

~~the invention in more detail than is necessary for a fundamental~~

understanding of the invention, the description taken with the drawings

5 making apparent to those skilled in the art how the several forms of the

invention may be embodied in practice. In the drawings:

FIG. 1 is a front view, in partial cross-section, of a first embodiment of the needle driver according to the present invention:

FIG. 2 is a top view, in partial cross-section, of the needle driver

10 of Figure 1;

FIG. 3 is a front view, in partial cross-section, of the housing of the needle driver;

FIG. 4 is a top view of the housing;

FIG. 5 is a view in cross-section along plane V-V in Figure 3;

15 FIG. 6 represents an enlarge detail of the area encircled in Figure

3;

FIGs 7, 8 and 9 represent partially cross-sectional front, top and side views, respectively, of the thimble-like grip;

09372578.081299

FIGs. 10 and 11 show a front view in cross-section, and a bottom view, respectively, of the ratchet of the needle driver,

FIG. 12 is a greatly enlarged, perspective view of the needle pusher of the invention;

5 FIG. 13 is a similar view of the needle puller,

FIGs. 14 and 15 are a front view and a side view in cross-section, respectively, of the entrance guide;

FIGs. 16 and 17 are similar views of the exit guide;

FIGs. 18 and 19 are a front view in cross-section and a side view, 10 respectively, of the needle driver cap;

FIG. 20 is a partially cross-sectional front view of a dual needle driver according to the present invention;

FIG. 21 is a side view of the needle driver of FIG. 20 in the direction of arrow A;

15 FIG. 22 is a partially cross-sectional front view of the housing of the needle driver of Figures 20 and 21;

FIG. 23 is a partially cross-sectional top view of the housing;

FIG. 24 is a side view of the housing in the direction of arrow B;

FIG. 25 is an elevational view of the needle pusher;

09372578-081299

FIG. 26 is a cross-sectional view of the needle pusher of Figure 25;

FIG. 27 is a partial view of the needle pusher in the direction of arrow A;

5 FIG. 28 is a view of the detail of FIG. 27 in the direction of arrow B;

FIG. 29 is a perspective view of the needle puller, also indicating the position of the pusher-catching pawl;

FIG. 30 is an elevational view of the pusher-catching pawl;

10 FIG. 31 is a cross-sectional view, along plane XXXI-XXXI, of the pawl of Figure 30;

FIG. 32 illustrates a needle-retaining ring segment;

FIG. 33 is an elevational view of a variant of the needle pusher of Figure 25;

15 FIG. 33A is a schematic representation of the vagina and the urethra after a surgical procedure is completed using any of the devices described in figures 1-33;

FIGs. 34 and 35 are perspective views of finger-mounted devices for guiding a surgical instrument according to the present invention;

09372578.081299  
662180.827660

FIGs. 36-46 are cross sectional views of surgical instruments which can be guided using the finger-mounted devices of Figures 34-35, including a surgical needle, a needle carrying a surgical anchor ejectable therefrom, a puncturing device, an injection needle, a capillary, a puncturing capillary, a miniaturized surgical grasper, a miniaturized aspiration capillary, miniaturized surgical scissors and a miniaturized blade;

FIG. 47 is a perspective view of a finger-guided suturing device according to another aspect of the present invention, in which an ejected needle follows a circular path which is on a plane which parallels a plane traversing a surgeon's finger from top to bottom;

FIG. 48 is a perspective view of a finger-guided suturing device according to another aspect of the present invention, in which an ejected needle follows a circular path which is on a plane which is perpendicular to the surgeon's finger;

FIG. 49 is a cross sectional view of a housing engaged in a side wall of the device of Figure 47 or a front wall of the device of Figure 48;

FIGs. 50A and 50B show semi-circular needles employed in the devices of Figures 47-48;

09372578.001299

FIGs 51-54A are cross sectional views of steps in the ejection and withdrawal of a semi-circular needle from and into the device of Figure 47 or Figure 48 according to one embodiment of the present invention,

according to which a hinge of a rotating arm pushing or pulling the  
5 needle is colocalized with a virtual axis around which the needle is translocated.

FIG. 55 is a cross sectional view of extendible-retractable rotating arm used for pushing or pulling the needle according to another embodiment of the present invention:

10 FIGs 56-59 are cross-sectional-views of steps in the ejection and

withdrawal of a semi-circular needle from and into the device of Figure 47 or Figure 48 according to another embodiment of the present invention, according to which the hinge of the extendible-retractable rotating arm pushing or pulling the needle is localized in offset with  
15 respect to the virtual axis around which the needle is translocated, to thereby achieve farther ejection of the needle.

FIG. 60 is a cross sectional view of a mechanical/electrical remote control device used to operate and/or monitor the operation of the devices of Figures 47 and 48, showing a rotating actuator and one end of a

09372578.081299

rotation relay engaged thereby and which is used for rotating the rotating arm which pulls or pushes the needle, in addition, a portion of a reporting mechanism which is used for monitoring the needle ejection process is shown;

5 FIG. 61 shows another portion of the monitoring mechanism;

FIG. 62 shows a suture inserted in a tissue using the devices of Figures 47 or 48;

FIG. 63 is a perspective view of a finger-guided sampling device according to another aspect of the present invention, showing a capillary and a puncturing device thereof in their withdrawn position;

FIG. 64 is an enlarged perspective view of a portion of the finger-guided sampling device of Figure 63, showing the capillary and the puncturing device thereof in their ejected position;

FIG. 65 is a top enlarged view of remote actuators employed for ejecting/withdrawing the capillary and the puncturing device;

FIG. 66 is a cross sectional view of a capillary having sharp edges and which is equipped with a reporting mechanism for reporting the presence of electro conductive collected sample therein;

09372578-081299



FIG. 67 shows the device of Figure 63 mounted on a surgeon's pointing finger and used to sample a fetal scalp during labor, while the sleeve thereof is ejected, wherein C is the cervix and S is the fetal scalp;

FIG. 68 is a perspective view of an anchor implanting device  
5 according to the present invention;

FIG. 69 is a cross sectional view of a single housing engaged in a wall of the device of Figure 68;

FIG. 70 is a cross sectional view of a remote rotating actuator employed in the device of Figure 68;

FIG. 71 is a cross sectional view of a remote translating actuator  
10 employed in the device of Figure 68;

FIG. 72 is a cross sectional view of an anchor guiding element and an anchor guided thereby of the device of Figure 68;

FIG. 73 is a cross section view of the anchor guiding element and  
15 the anchor guided thereby being in the housing of the device of Figure 68,

FIG. 74 is a cross section view of the anchor guiding element and the anchor guided thereby being ejected from the housing of the device

09372578.081299

of Figure 68, while the anchor is ejected from the guiding element and anchored in a tissue, and

FIGs. 75-76 are perspective views of adapters according to the present invention.

5

#### DESCRIPTION OF THE PREFERRED EMBODIMENTS

The present invention is of finger-guided surgical instruments which can be used to perform extra as well as intrabody surgical tasks, such as, but not limited to, cutting, grasping, suturing, sample collection by capillary forces or aspiration, placement of anchors and the like. Specifically, the present invention can be used to perform surgical tasks in body locations of limited minimal-invasive accessibility. The present invention is further of surgical procedures in which one or more finger-guided surgical instrument of the present invention are used to cut, grasp, suture, collect a sample, place anchors and the like, especially in body locations of limited minimal-invasive accessibility.

09372578.081299

The principles and operation of the instruments and procedures of the present invention may be better understood with reference to the drawings and accompanying descriptions.

Before explaining at least one embodiment of the invention in detail, it is to be understood that the invention is not limited in its application to the details of construction and the arrangement of the components set forth in the following description or illustrated in the drawings. The invention is capable of other embodiments or of being practiced or carried out in various ways. Also, it is to be understood that the phraseology and terminology employed herein is for the purpose of description and should not be regarded as limiting.

Referring now to the drawings, Figures 1-33 relate to a finger-guided suturing device according to one aspect of the present invention. Figures 1 and 2 show a frontal view and a top view, respectively, of a first embodiment of this aspect of the present invention. These assembly drawings are intended to show the relative positions of the different components of the device, while the components themselves are illustrated in Figures of their own, as further detailed in the following sections.

09372578.081299

It should be noted that the cross-sectional portions of Figure 2 are not located in a common plane. Portions A are produced by cross-section along plane A-A in Figure 1, while portion B is produced by cross-section along plane B-B in Figure 1.

5 The first embodiment of the finger-guided suturing device according to the present invention comprises a housing 2, a thimble-like finger grip 4 rotatably fitting the inside of housing 2, an arcuate ratchet 6 fixedly attached to thimble-like finger grip 4, a substantially semi-circular surgical needle 8, to the rear end of which is fixedly attached a  
10 length of suture 10, a needle pusher 12 having a pawl 14 adapted to interact with ratchet 6, a needle puller 16 having a pawl 18 adapted to interact with ratchet 6, a needle catch 20 cooperating with needle puller 16, a needle exit guide 22, a needle entrance guide 24, a cap 26 and a helical spring 28.

15 Seen in Figures 3-5 is housing 2, which geometrically is substantially in the shape of a hollow cylinder, part of which has been cut away along a plane substantially parallel to, but radially offset from, an axial plane of the cylinder, as is clearly shown in Figure 4. The hollow section thus subtends an angle larger than 180°.

09372578-081299

The bore of housing 2 is seen to have three sections. an upper, cylindrical section 30, a lower, cylindrical section 32, and a tapering, intermediate section 34 connecting the two cylindrical sections. Further

shown is an internal, peripheral groove 36 located near the lower end of housing 2 and serving to guidingly accommodate two lugs integral with finger grip 4 (Figure 7) and permitting the latter one degree of freedom in rotation. Two further grooves 38 (of which only one is shown in Figure 3) cut across grooves 36 and extend beyond them, facilitating the introduction of finger grip 4 upon assembling the device and also serve a

10 further purpose, to be explained further below. The location of grooves 38 can be seen in Figure 5.

Near the upper end of housing 2, there are shown a first peripheral groove 40 and, somewhat above it, a second peripheral groove 42. Groove 40, as will be explained further below in greater detail, 15 accommodates substantially semi-circular surgical needle 8; groove 42 serves to guide two further components in their movement: needle pusher 12 and needle puller 16.

The enlarged detail of Figure 6 shows groove 40 and groove 42 of housing 2, as well as ghosted-in needle driver 12 which, together with

09372578.081299

-C

groove 40, defines a duct 46 which guides needle 8 (Figures 1 and 2) during the surgical procedure. Shoulder 47 (Figures 3 and 6) serves as abutment for cap 26 (Figure 18).

In Figure 4, there is shown an area 49 which has been cleared of the collar comprising grooves 40, 42 down to shoulder 47, to provide space for entrance guide 24 (Figures 14 and 15).

Represented in Figures 7 to 9 is finger grip 4, i.e., the thimble-like, cut-open sleeve located inside housing 2 that accommodates and grips the distal phalanx of the surgeon's index finger, leaving its ventral portion at least partly exposed for palpation. Also shown are two lugs 44 which, as mentioned above, are seated inside groove 36 in housing 2 and restrain the finger-imparted movement of finger grip 4 to rotary movement only, except when lugs 44 are brought into alignment with grooves 38 of housing 2 (Figure 5), in which situation finger grip 4 is also capable of a short axial movement relative to housing 2, for a purpose to be explained further below.

Figures 10 and 11 represent a ratchet 6 fixedly attached to, or integral with, finger grip 4. The purpose of ratchet 6 is to convert the reciprocative rotational motion of the surgeon's finger into an

09372578.081299

intermittent, unidirectional advance of surgical needle 8 (Figures 1 and 2). Ratchet 6 is seen to consist of a body 48, which carries on its underside an arcuate arrangement of ratchet teeth 50 subtending an angle

of about 180°, and on its upper side, a rod 52, the purpose of which will

5 become apparent further below.

Surgical needle 8 is of a substantially semi-circular shape and, near its sharp point, is provided with a notch 9 that is instrumental in returning needle 8 into housing 2 after completion of the stitch. The other end of needle 6 is provided with a bore, to which is attached a

10 length of suture material 10.

Figure 12 represents needle pusher 12, a nose 52 of which moves along and is guided by groove 42, as is clearly shown in Figure 6.

Pushing projection 54 moves in duct 46 (Figure 6) and is seen to engage the rear end of needle 8, the suture passing through hole 56. In assembly,

15 the elastically resilient pawl 14 is pressed against teeth 50 of ratchet 6.

When the surgeon rotates his finger in the counter-clockwise direction, one of the ratchet teeth 50 engages pawl 14, whereby needle 8 is pushed along by pawl 14, needle pusher 12 and projection 54. The angular range over which the surgeon can twist his finger is of course limited (30-40°).

09372578.001299  
662180.8/527E60

At the end of the rotary motion, the finger returns in the clockwise direction to its original position. During this return movement, ratchet teeth 50 disengage from pawl 14 due to the slant of the latter, and needle

pusher 12 remains stationary, in spite of the rotary movement of finger grip 4, and is again moved only when the surgeon's finger renews its "working stroke" in the counter-clockwise direction.

Figure 13 represents needle puller 16 and its pawl 18. Needle puller 16 is quite similar to pusher 12, except that projection 54 is replaced by a catch 58 which, as can be seen in Figure 13, fits notch 9 in ghosted-in needle 8. Also seen is a slanting hole 60, through which suture 10, coming from the rear of needle 8, leaves the suturing device.

From the moment needle 8 emerges from housing 2 via exit guide 22 and its flaring guide surface 23 (Figures 2, 16, 17), completes the stitching operation and fully returns into housing 2 via entrance guide 24 and its flaring guide surface 25 (Figures 2, 14, 15), needle movement is divided between needle pusher 12 and needle puller 16. At the beginning of the stitching procedure, needle puller 16 is located close to entrance guide 24 (Figure 2), its pawl 18 being beyond the reach of ratchet teeth 50 (which extend only over an angular range of 180 °). Needle pusher

09372578.081299



12, on the other hand, is located well within the effective range of ratchet teeth 50 adjacent to the rear end of needle 9, and, thus, with each movement of the surgeon's finger, will advance needle 8 until the latter

will reenter housing 2 via entrance guide 24. An additional movement of : needle pusher 12 will have the following results: (i) catch 58 of needle puller 16 will engage in notch 9 of needle 8; and (ii) further movement of needle 8 by needle pusher 12 will drag needle puller 16, by means of catch 9, into the effective zone of ratchet teeth 50 and, at the same time, move itself beyond the reach of ratchet teeth 50.

10 Any further maneuver of the surgeon's finger will thus act on needle puller 16 and draw needle 8 fully back into housing 2. When this has been accomplished, the stitch has been completed and the finger, as well as the needle driver, can be withdrawn, leaving the suture material anchored in the tissue and permitting the surgeon to tie up the stitch.

15 It will be appreciated that exit guide 22 and entrance guide 24 could also be integral parts of housing 2.

Figures 18 and 19 represent cap 26 (Figure 1) which, as mentioned above, is seated against shoulder 47 (Figure 6) and defines and delimits the annular space in which needle pusher 12 and needle

09372578-001299  
652180-8/22/86

puller 16 move. Cap 26 is cut open along a plane 62, common with housing 2. A further cutting plane 64 is set back relative to plane 62. A bore 66 is a sliding fit to rod 52 of ratchet 6. As shown in Figure 1, a

helical compression spring 28 is mounted on rod 52 and, abutting against ceiling 68 of cap 26, pushes ratchet 6 and finger grip 4 down as far as they will go, i.e., as far down as lugs 44 (Figure 7), moving in groove 36 (Figure 3), will permit. However, as already mentioned above, in a certain position of lugs 44 relative to slots 38 in housing 2, finger grip 4 can be slightly lifted by pushing it up against the restoring force of spring 28. This feature can be used by the surgeon, should he decide to relocate

needle 8 at a different spot, as long as notch 9 has not yet been captured by catch 58. All he has to do is to push up finger grip 4, which will cause the teeth 50 of ratchet 6 to lose contact with pawl 14. The surgeon can then move needle 8 back by pulling at the free end of suture 10.

The assembly of another embodiment of the suturing device according to this aspect of the present invention is shown in Figures 20 and 21. There are shown a housing 70, two needles 72, two needle pushers 74, two needle pullers 76, two pawls 78, two exit guides 80, two

09372578.081299

entrance guides 82, two needle-retaining rings 84 and two cover plates 86.

~~Housing 70 (Figures 22-24) is substantially prismatic and~~

comprises a bore 88, the lower part of which is cylindrical and the upper  
5 part of which, tapering and thimble-like, accommodates and firmly holds  
the surgeon's finger. As in the previously-described embodiment,  
housing 70 is cut along a plane parallel to, but distant from, the axis of  
bore 88, so that the bore is exposed but still surrounds the surgeon's  
finger over more than 180°. Housing 70 is completely symmetrical  
10 laterally of the axis of bore 88, so that whatever is described about one  
side thereof, pertains also to the other side.

There are shown a substantially cylindrical depression or recess 90  
(or rather, a segment of a recess, due to the cut-off front portion of  
housing 70) which houses most of the components described further  
15 below, a central hole 92 and a groove 94 at the bottom of recess 90,  
which accommodates needle 72. Also shown are two slots 96, 98, which  
accommodate exit guide 78 and entrance guide 80, respectively. Needle  
72, including notch 73, is identical to that described above with reference  
to the previous embodiment, including suture 75 attached to its end.

09372578.081299

Needle pusher 74 is seen in Figure 25 to consist of a central, substantially cylindrical portion 100, provided with a short shaft 102 (Figure 26) fitting hole 92 in housing 70, and a radially extending arm 104. The rear of arm 104 is provided with a curved ledge 106 (Figure 28), integral with which is a lug 108 having a hole 110 (Figure 27), through which passes suture 75. By means of a disk 112, the cylindrical portion 100 is turned into a reel or drum 101 onto which cords 115 can be wound (see Figure 20), for a purpose to be explained further below.

Figure 29 represents needle puller 76, also indicating the position of pawl 78. Further shown is catch 114, the purpose of which is to engage notch 73 of needle 72 when the latter is to be returned into housing 70 after the stitch has been completed. Also shown is a hole 116, which passes through needle puller 76 and through which suture 75 is threaded. The initial position of needle puller 76 within housing 70 is clearly seen in Figures 20 and 21. While needle puller 76 and pawl 78 are shown here to be two different components, they can conceivably be produced as an integral whole, since, in any case, they must move together.

09372578.081299

Exit and entrance guides 80 and 82 respectively are essentially the same as those used in the previous embodiment, plates with a flaring lead-in and a hole for the needle to pass through. Needle-retaining ring

segment 84 (Figure 32) fits into recess 90 (Figure 22) and, together with groove 94, defines the duct in which needle 72 moves. Recesses 90, as well as slots 96, 98, are covered by cover plates 86, which also serve to retain needle pusher 74, needle puller 76 and pawl 78 (Figure 20). A recess 118 in the lateral walls of housing 70 provides room into which pawl 78 is deflected when engaging needle pusher 74, as will be presently explained.

The above-described dual-needle embodiment of the suturing device according to this aspect of the present invention (Figures 20-31) is operated by the surgeon pulling a cord, using his other, free hand. To this end, two cords or threads are wound onto each drum 101 in two opposite senses of winding: for example, one blue cord for each drum 101 which, when pulled, will move its respective needle pusher 74 towards its exit guide 80, i.e., advancing its needle 72, and the other, a red cord for each drum, which, when pulled, will move is needle pusher 74 towards its entrance guide 82.

09372578-081299  
662180-8/527660

After the proper location for the stitching operation has been found by palpation, the surgeon, by pulling both blue cords, thus advances needle pushers 74 towards exit guides 80, which serve also as stops to the advancing motion of needle pushers 74. By the time the surgeon feels that needle pushers 74 have been stopped, needle 72 have already commenced to re-enter housing 70 via entrance guides 82, with their notches 73 being captured by catches 114 (Figure 29). Pulling the red cords will return needle pushers 74 in a direction towards entrance guide 82 and permit pawl return needle pushers 74 in a direction towards entrance guide 82 and permit pawl 78 to capture needle pushers 74 by engaging lugs 108 (Figure 27). Again pulling the blue cords will move needle pushers 74 again towards exit guide 80, dragging along pawl 78 and needle pullers 76 (attached to, or integral with, pawls 78), thus, by means of their catches 114, returning needles 72 into housing 70. The needle driver may then be withdrawn.

A variant of needle pusher 74 is seen in Figure 33. In the final stage of the proceedings, after the tip of needle 72, including notch 73, has already re-entered housing 70, the variant needle pusher 74A also serves as needle puller, obviating the need for a separate needle puller 76

09372578.081299

(Figure 29). In the original embodiment, pawl 78, being part of needle puller 76, merely serves as a mechanical link to hitch needle puller 76 to needle pusher 74, to enable the latter to complete withdrawal of needle

72. In the above variant, needle pusher 74A functions also as needle puller 76 as soon as, the red cord having been pulled, pawl 78A, now part of needle pusher 74A, engages needle notch 73 with its catch 114A. Pulling now the blue cord will cause needle pusher 74A to move towards exit guide 80, dragging along needle 72 until it is fully inside housing 70.

Use of this variant also requires a slight modification in housing

~~10 70. Recess 118 in the walls of housing 70, which provided room for~~

pawl 78 to be deflected into, must now be transferred to the other side of the needle path.

Using a dual-needle driver makes it possible to simultaneously place one stitch on either side of the urethra, or to place, in two successive steps, two stitches on either side thereof, in which case the needle driver has to be replaced prior to the second step.

Figure 33A is a schematic representation of the vagina and the urethra after the surgical procedure is completed, with V indicating the vagina; U, the urethra; CL, Cooper's ligament; and S, suture stitches

09372578-081299

Obviously, both the first and the second embodiments of the suturing device according to this aspect of the invention will have to be produced in a range of different sizes to allow for the different sizes of the surgeons' fingers, or as further detailed hereinunder, adapters can be employed.

Although in the second, above-described embodiment of the suturing device, the needles are maneuvered by alternatingly pulling cords, embodiments are also envisaged in which the needles are manipulated by manual, electric or hydraulic actuators controlled by the surgeon, examples of which, in context of the following aspects of the invention are provided hereinbelow.

The first embodiment of this aspect of the present invention was experimentally found limiting in applications requiring high precision, because in order to advance the needle, the surgeon has to rotate his or her finger, thus operating the ratchet. The second embodiment of this aspect of the present invention was found to be somewhat limiting because pulling the cords (i) fails to give a surgeon a feeling of degree; and (ii) in some cases results in displacement of the device.

09372578.081299



In search for improvements, the inventors realized several configurations which are further described hereinunder with reference to Figures 34-76, which, on one hand, broaden the scope of the invention,

while, on the other hand, in preferred embodiments, overcome one or more of the limitations associated with the so far described aspects of the invention.

Thus, as shown in Figures 34-35, according to another aspect of the present invention there is provided a finger-mounted device 200 or 202 for guiding a surgical instrument. Device 200 or 202 comprising a thimble-like element 204 which is adapted to surround at least a portion of a surgeon's finger, while at least partially exposing the ventral tactile portions of the distal phalanx thereof, which tactile portions extending from the finger tip just underneath the nail and down to joint, so as to enable the surgeon to tactile sense a body location to be operated.

Thimble-like element 204 is formed with at least one longitudinal guiding tunnel or housing 206 formed within a wall thereof. Longitudinal guiding tunnel 206 serves for guiding a surgical instrument therethrough, so as to enable the surgeon to operate a body location. Thus, by mounting device 200 over the dorsal portion of the distal

09372578.081299

phalanx of a finger, the surgeon entire ventral tactile portions of the distal phalanx thereof, extending from the finger tip just underneath the nail and down to joint are exposed for tactile sensing, while, by mounting

device 200 over the ventral portion of the distal phalanx of a finger, or  
5 alternatively, by mounting device 202 over the distal phalanx of a finger, only the surgeon finger's tip is exposed for tactile sensing. Thus, in both cases, the most nerved and therefore tactile sensitive portion of the ventral tactile portions of the distal phalanx of the surgeon's finger, i.e., the finger's tip, just underneath the nail, are exposed for tactile sensing.

10 The surgical tool insertable through housing 206 of device 200 or 202 according to the present invention can be of any type. Examples include, but are not limited to, a surgical needle 210 (Figures 36, 37) or a needle 211 carrying a surgical anchor ejectable therefrom 211A (Figure 38) both holding a suture or cord 210A, a puncturing device 212 (Figure  
15 39), an injection needle 213, which is shown connected at a proximal end thereof to a syringe 213A (Figure 40), a capillary 214 (Figure 41), a puncturing capillary 215, shown to have sharp distal edges 215A (Figure 46), a miniaturized surgical grasper 216 (Figure 42), a miniaturized aspiration capillary 217, shown connected to a syringe 217A (Figure 45),

09372578.081299

miniaturized surgical scissors 218 (Figure 43) and a miniaturized blade 219 (Figure 44).

~~According to another aspect of the present invention there is~~

provided a finger-guided surgical instrument which includes a thimble-like element 204 essentially as described above and which is, as described above, adapted to surround at least a portion of a surgeon's finger, while at least partially exposing the ventral tactile portions of the distal phalanx thereof, so as to enable the surgeon to tactile sense a body location to be operated. In contrast, with the construction of housing 206

~~of devices 200 or 202, the housing of the finger-guided surgical~~

instrument according to this aspect of the present invention is occupied at all times, as further detailed and exemplified below, by a surgical tool or a portion thereof, and a mechanism for its operation. Thus, the finger-guided surgical instrument further includes an ejectable surgical tool

15 which is engaged within a housing formed within, or connected to, a wall of the thimble-like element; and a mechanism for ejecting the surgical tool from the thimble-like element, so as to enable the surgeon to operate a body location. Specific examples of finger-guided surgical instruments according to various aspects of the present invention are further

09372578-081299

described hereinunder, followed by general features which are preferably common to all of the finger-guided surgical instruments of the present invention.

Thus, as shown in Figures 47-61, according to yet another aspect of the present invention there is provided a finger-guided surgical instrument which serves as a finger-guided suturing device. The device includes a thimble-like element 300, which is adapted to surround a portion of a surgeon's finger, while exposing the ventral tactile portions of the distal phalanx thereof, so as to enable the surgeon to tactile sense a body location to be operated.

According to a preferred embodiment of this aspect of the present invention thimble-like element 300 is constructed so as to be mounted over a dorsal side of the distal phalanx of the surgeon's finger, thereby exposing the entire ventral tactile portions of the distal phalanx including the tip.

The device according to this aspect of the present invention further includes an ejectable, substantially semi-circular, surgical needle 302 which is engaged within a housing 304, which is formed within, or connected to, a wall 306 of thimble-like element. As shown in Figure 47,

00372578-081209  
662780-8/527560

wall 306 can be a side wall of member 300, or alternatively, as shown in Figure 48, wall 306 can be a front wall of member 300. Needle 302 serves for holding and guiding a suture 308 which is attached at one end

thereof to substantially semi-circular surgical needle 302. The suturing device according to this aspect of the present invention further includes a mechanism 310 for ejecting surgical needle in a circular path through an ejection opening in housing from thimble-like element and thereafter withdrawing surgical needle back into thimble-like element through a withdrawal opening in housing, so as to enable the surgeon to suture body location.

Mechanism 310 of the suturing device according to this aspect of the present invention includes a substantially semi-circular channel 312 formed in housing 304 and connecting ejection and withdrawal openings 314 and which fully engages substantially semi-circular surgical needle 302 before its ejection and following its withdrawal, so as to direct substantially semi-circular surgical needle in circular path around a virtual axis 316. Mechanism 310 further includes a remotely operated rotating arm 318 rotatably engaged in housing 304 and rotatable about a hinge 320. Rotating arm 318 is designed to eject substantially semi-

09372578.081299

circular surgical needle 302 through ejection opening 314 by pushing a rear portion 302A of substantially semi-circular surgical needle 302 and rotating arm 318 is further designed to withdraw substantially semi-

circular surgical needle 302 through withdrawal opening 314 by pulling  
5 a front portion 302B of substantially semi-circular surgical needle 302.

According to one embodiment of the present invention, and as specifically shown in Figures 49, and 50-54A, virtual axis 316 and hinge 320 are co-positioned. However, according to another preferred embodiment of the present invention, and as specifically shown in  
10 Figures 56, and 59, virtual axis 316 and hinge 320 are offset, whereas rotating arm 318 is an extendible-retractable arm, which is shown isolated in Figure 55 to include a first, substantially hollow, segment 322 integrally formed with, or connected to, hinge 320 and including an extending spring element 324, and a second segment 326 extendibly-  
15 retractably accepted within the hollow of first segment 322, so as to be extended by the action of element 324 and retracted against the action of element 324. Segment 322 is preferably formed to include a stoppage so as to prevent the complete separation of segments 322 and 326. This latter configuration allows farther ejection of needle 302 in applications

09372578.081299

wherein such farther ejection is required. It will be appreciated that a configuration in which lesser ejection of needle 302 in applications wherein such lesser ejection is required is realizable, for example, by

s swooping the locations of hinge 320 and virtual axis 316. Alternatively, both hinge 320 and virtual axis 316 can be relocated farther away from openings 314 to otherwise achieve a similar result.

According to a preferred embodiment of the present invention substantially semi-circular surgical needle 302 is formed with a notch 303 (Figures 50A-B) at front portion 302B. Notch 303 is designed to  
10 accept a distal end 319 of rotating arm 318. A second notch 305 (Figure 50B) can be formed at rear portion 302A of needle 302 which is also designed to accept distal end 319 of rotating arm 318. Alternatively, or additionally, substantially semi-circular surgical needle 302 is formed with a blunt rear end 307 (Figure 50A-B) which is designed to be pushed  
15 by rotating arm 318.

Remotely operated rotating arm 318 includes a rotating wheel 330 portion rotatable about hinge 320 and an arm portion 332 connected to, or integrally formed with, rotating wheel portion 330. Mechanism 310 further includes a remote rotation relay 334 which serves for relaying

09372578.081299

rotary motion from a remote rotatable actuator 336 to rotating wheel portion 330 for effecting rotation of rotating arm 318. According to a preferred embodiment, a flexible tube 338 connects between housing 304 and remote rotatable actuator 336, tube engaging remote rotation relay.

Thus, as shown in sequence in Figures 51-54A and in Figures 56-59, in a starting position (Figures 51 and 56) needle 302 is fully engaged within housing 304, such that no parts thereof protrude from thimble-like element 300. For operation, as shown in Figures 51 and 56, arm 318 is positioned so as to push rear portion 302A of needle 302 upon rotation.

As shown in Figures 52-53 and 57-58, arm 318 is rotated by operating actuator 336 so as to eject front portion 302B of needle 302 out of housing 304 through ejection opening 314 until rear front 302B approaches withdrawal opening 314, whereas rear portion 302A is just about to leave ejection opening 314. Then, as shown in Figures 54 and 59, arm 318 is counter rotated about 180 ° and distal end 319 thereof engages notch 303 of needle 308, which has just entered withdrawal opening 314. Then, as shown in Figure 54A, arm 318 is rotated as before so as to complete a full cycle of needle 318. Since needle 318 is holding suture 308, as a result of the motion of needle 302, suture 308 follows the

09372578.081299



same circular path. Thus, as shown in Figure 62, by appropriately locating the suturing device described herein against a tissue 340, one can, using the suturing device as describe, to suture the tissue as shown.

As already mentioned above, and as shown in Figure 47, wall 306  
5 can be a side wall of member 300, in which case the circular path taken by needle 302 is on a plane which substantially parallels a plane traversing the surgeon's finger from top to bottom or alternatively, as shown in Figure 48, wall 306 can be a front wall of member 300. in which case the circular path taken by needle 302 is on a plane which is  
10 ~~substantially perpendicular to the longitudinal axis of the surgeon's~~  
finger. In yet another configuration, the circular path taken by needle 302 is on a plane which substantially parallels a plane traversing the surgeon's finger from side to side.

As specifically shown in Figure 61, according to a preferred  
15 embodiment of this aspect of the present invention the suturing device further includes a reporting mechanism 350 for reporting situations, such as, but not limited to, a full ejection of substantially semi-circular surgical needle 302, a full withdrawal of substantially semi-circular surgical needle 302, a degree of ejection of substantially semi-circular

09372578.081299

surgical needle 302 and a degree of withdrawal of substantially semi-circular surgical needle 302. Reporting mechanism 350 according to a preferred embodiment includes two or more terminals 352 (Figures 49

and 61) located along the ejection/withdrawal path and which form a part  
5 of a circuit 353 which includes a power source 354 and a light and/or sound indicator 356 (Figure 61), both are preferably located within a housing which also houses actuator 336 (Figure 60). In the example shown in Figure 61, when front portion of needle 302 enters withdrawal opening 314 between contacts 352, circuit 353 closes and indicator 356

10 operates, thereby indicating full ejection of substantially semi-circular surgical needle 302. It will be appreciated that by locating terminal at other locations along the path taken by needle 302 enables to similarly monitor a full withdrawal of substantially semi-circular surgical needle 302, a degree of ejection of substantially semi-circular surgical needle  
15 302 and a degree of withdrawal of substantially semi-circular surgical needle 302.

It will be appreciated that, in contrast with the suturing device of the first aspect of the invention, no finger movement is required to eject and/or withdraw needle 302. It will further be appreciated that using

09372578.081299

actuator 336 and mechanism 350, one gains a high level of control and preciseness on the operation of the suturing device according to this aspect of the present invention.

As shown in Figures 63-65 according to yet another aspect of the present invention there is provided a finger-guided surgical instrument which serves as a sampling device for sampling a sample from a body location.

The sampling device includes a thimble-like element 400 which is adapted to surround at least a portion of a surgeon's finger, while at least partially exposing the ventral tactile portions of the distal phalanx thereof, so as to enable the surgeon to tactile sense a body location to be sampled.

According to a preferred embodiment thimble-like element 400 is constructed so as to be mounted over a ventral side of the distal phalanx of the surgeon's finger, thereby exposing the tip of the ventral tactile portion of the distal phalanx, underneath the nail.

The device further includes an ejectable capillary 402 which is engaged within a housing 404 formed in a wall, e.g., back wall 406, of thimble-like element 400. The device further includes a first mechanism

09372578-081299

408 for ejecting ejectable capillary 402 from thimble-like element 400, so as to enable the surgeon to capillary sample the body location. Ejectable capillary 402 is preferably a translatably ejectable capillary, whereas first mechanism 408 is a remotely operated translatable ejection mechanism, having an ejection relay 409 operated via a translating actuator 420, and which propagates along a tube 422 to translate capillary 402. Capillary 402 is ejectable in a direction generally in extension of a longitudinal axis of thimble like element 400.

According to a preferred embodiment of this aspect of the present invention the sampling device further includes a translatably ejectable sleeve 410 which is engaged within housing 404 and surrounds ejectable capillary and a second mechanism 412 including a translation relay 413 for ejecting translatably ejectable sleeve 410 from thimble-like element 400, so as to shield the sampled body location from surrounding body fluids while sampling. Sleeve 410 is ejectable in a direction generally in extension of a longitudinal axis of thimble like element 400.

According to another preferred embodiment of the sampling device according to this aspect of the present invention, the sampling device further includes an ejectable puncturing device 414 which is

09372578-001299

engaged within housing 404, wherein first mechanism 408 further serves for ejecting ejectable puncturing device 414 from thimble-like element 400, so as to enable the surgeon to wound the body location to be

sampled. Device 414 is ejectable in a direction generally in extension of  
5 a longitudinal axis of thimble like element 400.

According to an alternative embodiment of the sampling device according to this aspect of the present invention, and as specifically shown in Figure 66, ejectable capillary 402 has sharp edges 416 so as to enable the surgeon to wound the body location, thereby obviating the  
10 need for puncturing device 414. In this case, ejectable capillary 402 is preferably a rotatably-translatable ejectable capillary, whereas first mechanism 408 is a remotely operated rotatable-translatable ejection mechanism (Figure 65, shown as thread 411), having an ejection relay 409 operated via a rotating-translating actuator 421, and which rotatably  
15 propagates along tube 422 to rotatably translate capillary 402.

According to another preferred embodiment, ejectable capillary 302 is an ejectable aspiration capillary, whereas the sampling device further includes a remote aspirating device, such as a syringe 430, which is in fluid communication with ejectable aspiration capillary via a tube

09372578-081299

433 which also serves as relay 409 is employed to aspirate a sample into capillary 402, thereby obviating the need to depend on capillary action for sample collection. enabling the collection of larger volumes in a single sampling session.

- 5 It will be appreciated that mechanisms 408 and 412 can be used to withdraw their respective tools, prior to the removal of the sampling device from the sampled body location, if so required, in order not to risk injuring the patient doing so.

According to a preferred embodiment of this aspect of the present

10 ~~invention the sampling device further includes a reporting mechanism~~

- 440 for reporting a situation, such as, but not limited to, a full ejection of capillary 402, sleeve 410 and/or device 414, a full withdrawal of capillary 402, sleeve 410 and/or device 414, a degree of ejection of capillary 402, sleeve 410 and/or device 414 and a degree of withdrawal  
15 of capillary 402, sleeve 410 and/or device 414. Reporting mechanism 440 operates in a fashion similar to mechanism 350 described hereinabove with respect to Figure 61. whereby capillary 402, sleeve 410 and/or device 414 are conductive and the presence of portions thereof is

09372578.08159  
662180-2/52/EE60

determined by closing or opening an electrical circuit so as to activate or deactivate an indicator 457 (Figure 65).

As specifically shown in Figure 66, according to another preferred

embodiment of this aspect of the present invention the sampling device

5 further includes a reporting mechanism 460 in capillary 402 for reporting to the surgeon of a situation, such as, but not limited to, a presence of fluid in capillary 402 and a level of fluid in capillary 402. Since body fluids are conductive, such fluids serve to close circuit 462 by engaging a space between terminals 464, so as to enable a power source 466 to

10 power an indicator 468.

As shown in Figures 68-74, according to still another aspect of the present invention there is provided yet another finger-guided surgical instrument which serves as an anchor implanting device. The anchor implanting device comprising a thimble-like element 500 which is  
15 adapted to surround at least a portion of a surgeon's finger while at least partially exposing the ventral tactile portions of the distal phalange thereof, so as to enable the surgeon to tactile sense a body location into which anchor or a pair of anchors are to be implanted. Thimble-like element 500 is preferably constructed so as to be mounted over a dorsal

09372578-081299

side of the distal phalanx of the surgeon's finger, thereby exposing the entire ventral tactile portions of the distal phalanx.

The device further includes at least one ejectable anchor guiding

element 502 which is engaged within at least one housing 504 which is  
5 formed within, or connected to, at least one wall, preferably side walls  
506 of thimble-like element 500. The device further includes at least one  
first mechanism 508 for ejecting anchor guiding element(s) 504 from  
thimble-like element 500, so as to penetrate or come closer to a body  
location. The device further includes at least one ejectable anchor 510  
10 engaged within ejectable anchor guiding element(s) 502, a cord 507 is  
connected thereto at a position so as to effect rotation and therefore  
efficient anchorage of anchor(s) 510 when anchored in the body location  
by pulling on cord 507. The device further includes at least one second  
mechanism 512 which serves for ejecting ejectable anchor(s) 510 from  
15 within ejectable anchor guiding element(s) 502, so as to enable the  
surgeon to anchor ejectable anchor(s) 510 in the body location.

According to a preferred embodiment of the present invention first  
mechanism(s) 508 include at least one remotely operated rotating arm  
514 which is engaged in housing 504 and which is rotatable about a hinge

09372578.081299



516. Arm(s) 514 are designed to eject ejectable anchor guiding element(s) 502 through at least one ejection opening 516 formed in housing(s) 504 by pushing rear portion(s) 518 of ejectable anchor

guiding element(s) 502. According to a preferred embodiment, remotely

5 operated rotating arm(s) 514 are further designed to withdraw ejectable anchor guiding element(s) 502 by pulling rear portion(s) 518 of ejectable anchor guiding element(s) in a reverse direction. According to a preferred embodiment arm(s) 514 are rotated by a shared remote rotation actuator 520 which rotates relay(s) 522 which pass through a tube 524

10 and surrounds rotating wheel(s) of arm(s) 514.

Second mechanism(s) 512 include at least one remotely operated translatable ejection mechanism 530 which serves for ejecting anchor(s) 510 from ejectable anchor guiding element(s) 502. Mechanism(s) 530 are operated via a translation actuator 532 and a translation relay 534

15 passing through tube 524.

Closed-open circuitries are preferably employed as a reporting mechanism for reporting a situation, such as but not limited to a full ejection of the at least one ejectable anchor, a full ejection of the at least one ejectable anchor guiding element, a full withdrawal of the at least

09372570.001290

one ejectable anchor guiding element, a degree of ejection of the at least one ejectable anchor guiding element and a degree of withdrawal of the at least one ejectable anchor guiding element. The operation of such

circuits are further described herein above with respect to other aspects

5 of the present invention.

Thus, as shown in Figure 74, by first ejecting guiding elements 502 and then ejecting anchor(s) 510, the surgeon can anchor anchor(s) 510 to a tissue 560. By pulling cord 507, the surgeon tilts an anchor 507 so as to be strongly engaged within tissue 560.

10 The devices described hereinabove enjoy several advantages over

prior art designs. All of the devices described include a thimble-like element which is designed to enable tactile sensing by a wearing finger.

All of the devices include an ejectable surgical tool, which is withdrawn in a housing of the device and which is ejected only upon use. Thus, the

15 devices according to the present invention allow the surgeon to sense a body location to be operated or treated while approaching the location without the disturbance of a permanently protruding surgical tool, tactile sense the location, and then, at the appropriate location, eject the tool to operate or treat the patient. In some embodiments, the ejection process is

09372578.081299

by a ratchet mechanism operated by rotating the surgeon's finger, whereas in other embodiments remote translation or rotation actuators are employed, which actuators are operable by the free hand of the surgeon.

The following sections describe some preferred embodiments, one or more of which can be applied to any of the devices of the present invention. Some of these embodiments have already been described with respect to some of the described devices, but not others and are therefore repeated herein in a more generalized form.

Thus, as shown in Figures 75 and 76, according to a preferred embodiment of the present invention, and in order to fit a plurality of fingers of a single surgeon, or in order to fit a single finger, such as the pointing finger, of a plurality of surgeons having fingers in a variety of thicknesses, the finger-mounted device for guiding a surgical instrument and/or the finger-guided surgical instrument according to the present invention further includes an adapter 600 which is insertable between the thimble-like element and the surgeon's finger, so as to adapt the finger-mounted device or the guided surgical instrument to fingers of different sizes

09372578-081299  
662180-0752780

As shown in Figure 63, according to another preferred  
embodiments of the present invention any of the finger-mounted devices

~~for guiding a surgical instrument and/or the finger-guided surgical~~

instruments according to the present invention can include a supporting

- 5 strap 602, for firmly mounting and supporting the device or instrument  
onto the surgeon's finger.

In preferred embodiments of the present invention the mechanism  
which is employed to eject a surgical tool out of the housing of the  
thimble-like element includes a first portion engaged within the housing

10 ~~and which is in contact with the ejectable surgical tool and a second,~~

remote, portion extending out of the patient's body and which includes an

actuator operable by a free hand of the surgeon, so as to eject the surgical

tool from the thimble-like element. Alternatively, the mechanism

includes a ratchet member disposed between the thimble-like element

- 15 and the surgeon's finger, so as to eject the surgical tool from the thimble-

like element by twisting back and forth the surgeon's finger. Any such

mechanism is shown herein to also function for withdrawing the

ejectable surgical tool back into the housing. Depending on the specific

application, any one or more walls of the thimble like element can

09372578.081299

include a housing for engaging the ejectable surgical tool and at least a portion of the mechanism employed for its ejection. Thus, side, front and back walls can be used accordingly.

The thimble-like element employed in any of the aspects  
5 according to the present invention can be constructed so as to be mounted over a dorsal side of the distal phalanx of the surgeon's finger, thereby exposing the entire ventral tactile portions of the distal phalanx. Alternatively, the thimble-like element is constructed so as to fully surround the distal phalanx and expose the tip of the ventral tactile  
10 ~~portion of the distal phalanx, just underneath the nail. Yet, alternatively,~~  
the thimble-like element is constructed so as to be mounted over a ventral side of the distal phalanx of the surgeon's finger and expose the tip of the ventral tactile portion of the distal phalanx. In some embodiments of the present invention the surgical tool is ejectable in a direction generally in  
15 extension of a longitudinal axis of the thimble like element. However, in other embodiments, the surgical tool is ejectable in a circular path which can be on a plane which substantially parallels a plane traversing the surgeon's finger from top to bottom, on a plane which substantially parallels a plane traversing the surgeon's finger from side to side, or on a

09372578.081299

plane which is substantially perpendicular to the longitudinal axis of the surgeon's finger.

Throughout the specification examples have been given to the use

of any one of a plurality of ejectable surgical tools in context of the  
5 finger-mounted device or surgical instrument of the present invention.  
Thus, a surgical needle, a needle carrying a surgical anchor ejectable  
therefrom, a puncturing device, an injection needle, a capillary, a  
puncturing capillary, a miniaturized surgical grasper, miniaturized  
surgical scissors, a miniaturized blade and/or an aspiration capillary can  
10 ~~all be either guided via the finger mounted device and/or ejectably and~~  
operatively engaged with the finger guided surgical tool according to the  
present invention.

According to preferred embodiments, the finger-mounted device  
for guiding a surgical instrument and/or the finger-guided surgical  
15 instrument include a reporting mechanism for reporting at least one  
situation selected from the group consisting of a full ejection of the  
surgical tool, a full withdrawal of the surgical tool, a degree of ejection of  
the surgical tool and a degree of withdrawal of the surgical tool.

09372578.081299

As shown, for example, in Figures 34, 35, 47, 48, 63, 64 and 68, according to a preferred embodiment of the present invention the finger-mounted device and/or the finger-guided surgical instrument further

includes at least one optical head 700 engaged by the thimble-like  
5 element thereof. Optical head 700 communicates with a monitor or any other display for presenting the surgeon with details of the path to the body location to be treated or the treated body location itself prior, during or after treatment. Optical head 700 can include a miniaturized camera and/or preferably a bundle of optic-fibers to generate an image which is

10 representable on a monitor or any other display. In addition, optical head

700 can include one or more optical elements such as, but not limited to, lenses, prisms, reflectors and the like. Of particular interest is a fish-eye lens which can be used to provide a larger field of view for optical head  
700.

15 According to a preferred embodiment of the present invention, optical head 700 includes a lens for focusing imagery data onto a bounclle of fiber optics which transmit the imagery data to a sensor, such as, but not limited to, a camera which is remote and connectable to the device or

00372578-081299

instrument. This feature is of importance in cases the device or instrument are of a disposal type.

~~The following sections relate to the use of the finger-guided~~

surgical instruments herein described in various surgical procedures. It is understood that these procedures are provided as examples and are not to be taken as limiting. It will be appreciated by one of skills in the art that many other procedures can be performed using the instruments of the present invention. More particularly, the following exemplary surgical procedures describe surgical protocols in which a single finger of a surgeon is inserted intrabodily and is employed to tactile sense a body location to be treated. However, it will be appreciated that the instruments of the present invention may find uses in other extra or intrabody surgical procedures.

While the suturing devices according to the invention will be described and explained herein as being applied in a novel procedure for bladder-neck suspension used for treatment of urinary incontinence (genuine stress urinary incontinence - GSUI) in females, it is also suitable for application in, e.g., sacro-spinous ligament fixation, and for anchoring suture material, even in conventional transabdominal pelvic

09372578-001299



surgery, where in obese patients exposure is limited and the surgeon has to rely on palpation of pelvic structures.

~~The procedure is a surgical treatment of genuine stress urinary~~

incontinence (GSUI) in females, and aims at the correction of the  
5 suspension of the anatomical area defined as the "bladder neck", i.e.,  
returning the bladder neck to its former, normal position. Such  
procedures are known, the one having the highest success rate being the  
Burch Colposuspension, in which the pelvic fascia and vaginal wall  
lateral to the urethra is suspended to Cooper's ligament. While this  
10 ~~procedure indeed appears to be the most promising, it still is a~~

transabdominal method, requiring general anesthesia, an extensive  
abdominal incision and hospitalization.

While the procedure facilitated by the present invention follows  
the same anatomical principles as the above-mentioned Burch method, it  
15 is, in contradistinction thereto, a transvaginal, rather than a  
transabdominal, bilateral suspension of the bladder neck to Cooper's  
ligament. It is this distinction which turns the treatment, as a matter of  
fact, into an office, outpatient procedure.

09372578-081299

The anchor implanting device described herein can be employed, for example, in an orthopedic procedure known as open Bankart shoulder stabilization.

Recurrent shoulder dislocations are relatively common. In an Israeli epidemiological study (Milgrom et al., Journal of Shoulder and Elbow, Nov. 1998) it was found that 0.05 % of soldiers between the ages of 17 and 33 suffer from this problem. The more a population is exposed to trauma or sports the higher the likelihood of dislocations. A shoulder dislocation in an elderly person however does not usually result in recurrent dislocations. Traumatic recurrent shoulder dislocation is usually treated by surgery. In the vast majority of cases, the essential lesion causing the recurrent shoulder instability is a tear of the anterior-inferior or anterior-medial labrum from the glenoid rim. This lesion needs to be repaired so that dislocation can be prevented. The procedure is done under general anesthesia, in a beach chair position. Usually three surgeons are required for executing the procedure. One to retract soft tissue, and two to perform the surgery. The advent of bone suture anchors has made the suture of the labrum back to bone simpler. There is however still considerable difficulty in passing the sutures that are

09372578.081299

attached to the bone suture anchors implanted in the glenoid rim from underneath the labrum to the labral superior surface in a very tight anatomical space. Because of this small space, performing the twisting

motion of the needle to pass it through the tissue in an exact way is

5 difficult. Typical to this repair of the labrum, 1-3 suture anchors are used and therefore 3 sutures have to be passed. The entrance of the suture at the proper site is very important because the labrum must be returned to its precise anatomical position to ensure a proper repair that will prevent recurrent dislocations. This task is readily performed using

10 ~~the finger-guided anchor implant device of the present invention. It also~~

allows the surgery to be conformably performed with a team of only two surgeons.

The sampling device according to the present invention can be employed as a scalp pH device.

15 Part of the contemporary management of labor includes evaluation of the fetal well being. This is done by fetal heart monitoring and measurement of fetal blood pH and gases. Fetal heart monitoring is performed by recording the electrical activity of the fetal heart and displaying it as a graph of the fetal heart rate at any time. The fetal blood

09372578-081299  
662180-81527E60

gases and pH are measured by sampling the fetal blood through the open cervix. The procedure is performed in order to confirm a suspicions of fetal distress that will jeopardize the fetal well being unless treated

immediately by delivery of the fetus. Presently, fetal scalp blood  
5 sampling can be performed only if the membranes has rapture and the cervix is open enough to allow the introduction of a cone shaped plastic tube with a diameter of 3-4 cm through the vagina and into the cervix. The tube is applied to the fetal scalp in direct contact. The obstetrician scratches the scaip skin using a sharp object through the tube and collect  
10 the drop of blood at the site of the scratch. The blood is taken for analysis.

The sampling device of the present invention allows the obstetrician to perform the same procedure in an easier and patient friendly fashion using his finger only. The device will eliminate the need  
15 to place the patient in dorsolithotomy position and suffer the discomfort of the large tube applied into her vagina. Mounting a small device that performs blood sampling over the obstetrician's finger enables to sample fetal scalp blood in an earlier stage of labor, in which the cervix opening

09372578.081299

is smaller, because the obstetricians finger diameter is smaller than the tube diameter.

In cases of Rectal Prolapse, which is a known complication of

Cystic Fibrosis, the surgical correction can be perform by constriction of  
the anal opening which might cause chronic defecation dysfunction or  
through an abdominal approach. In the transabdominal procedure the  
upper part of the rectum is anchored to the Sacral bone. Using any of the  
suturing devices of the present invention can render the anchoring  
procedure in the small and deep pelvic area an easier and shorter process,  
~~avoiding the need of extensive dissection to expose the correct~~  
anatomical target.

Another procedure that will benefit from the use of the suturing  
devices of the present invention is in the case of treating Esophageal  
reflux in children. The surgical correction is based on reconstruction of a  
one way valve mechanism around the Esophagus. Passing a "Vessel  
loop", i.e., a thin rubber band, around the Esophagus prevents the reflux.  
Any of the suturing devices of the present invention can replace the need  
for dissection of the Esophagus and makes it easy to pass the Vessel loop  
behind the esophagus in a short and safe fashion.

09372578-081299

Normal vaginal delivery expose the female pelvic floor to muscle and connective tissue trauma which in some cases results in pelvic floor relaxation and pelvic organ prolapse. Vaginal prolapse is a result of

weakening of connective tissue support to the vaginal vault apex. One of

5 the most common surgical techniques used to correct vaginal prolapse includes tying the upper part of the vagina to a connective tissue condensation stretched from both sides of the sacrum. This anatomical structure is called The Sacrospinous Ligament, and the procedure is called Sacrospinous Ligament Fixation. In order to perform the

10 procedure, the surgeon needs to open the posterior wall of the vagina and

enter to a space beside the rectum to reach the ligament. A surgical thread is anchored to the ligament and is thereafter tied to the vagina, thus fixing the upper part of the vagina to the ligament. Since the location of the ligament is deep in the pelvic hole, the surgeon needs to

15 perform extensive dissection to expose the ligament and place the suture material under direct visualization using long instruments. However, palpation of the ligament is easy and within reach of the surgeon's finger.

Mounting any of the suturing devices according to the present invention over the surgeon's finger thus enables the surgeon to place the suture in

09372578.081299

the correct location, avoiding the need for extensive dissection, reduce blood loss and shorten operation time. Palpation of the correct location makes the procedure even safer by reducing the risk of injury to pelvic blood vessels behind certain areas of the ligament.

- 5        Rupture of the rectum in large animals, especially horses and cows, oftentimes happens during rectal examination when a peristaltic wave passes over the wrist of the examiner, or following insertion of a stallion's penis into the rectum. Usually a colostomy is done to bypass the rectum and then an attempt is made to suture the tear in the rectum at
- 10    a distance of 30 to 40 cm from the anus. The suture is placed blindly by

palpation of the tear and an attempt is made to place a suture using a needle held by the finger of the operator. Any of the suturing devices according the present invention can be employed to assist suturing the tear.

- 15        Injury to the cervix after foaling is a known complication. This leads to infertility because of loss of the fetus through the cervix 1 to 3 months after conception. The present treatment involves placement of sutures into the cervix after conception, so as to reduce the size of the opening. These sutures are inserted blindly by a needle held by the

09372578.001299

fingers. Any of the suturing devices according to the present invention can be used instead.

In cases of rupture of the uterus at parturition, often the tear is

large and repair must be done by means of a laparotomy. However,

5 small tears can be caused by the foot of the foal. Present treatment is effected by placing sutures in the uterus after parturition, to close the small openings and prevent rupture of the uterus in the next pregnancy.

Presently, these sutures are placed blindly by a needle held by the fingers. Any of the suturing devices according to the present invention

10 can be used instead.

Although the invention has been described in conjunction with specific embodiments thereof, it is evident that many alternatives, modifications and variations will be apparent to those skilled in the art.

15 Accordingly, it is intended to embrace all such alternatives, modifications and variations that fall within the spirit and broad scope of the appended claims.

09372578-001299



## WHAT IS CLAIMED IS

1 A finger-guided surgical instrument, comprising:

(a) a thimble-like element being adapted to surround at least a portion of a surgeon's finger while at least partially exposing the ventral tactile portions of the distal phalanx thereof, so as to enable the surgeon to tactile sense a body location to be treated;

(b) an ejectable surgical tool being engaged within a housing

being formed within, or connected to, a wall of said thimble-like element; and

(c) a mechanism for ejecting said surgical tool from said thimble-like element, so as to enable the surgeon to operate said body location.

2 The finger-guided surgical instrument of claim 1, further comprising an adapter insertable between said thimble-like element and

09372578-081299

the surgeon's finger, so as to adapt the guided surgical instrument to fingers of different size.

3. The finger-guided surgical instrument of claim 1, wherein said mechanism includes a first portion engaged within said housing and which is in contact with said ejectable surgical tool and a second, remote, portion extending out of the patient's body and which is operable by a free hand of the surgeon so as to eject said surgical tool from said thimble-like element.

4. The finger-guided surgical instrument of claim 1, wherein said mechanism includes a ratchet member disposed between said thimble-like element and the surgeon's finger so as to eject said surgical tool from said thimble-like element by twisting back and forth the surgeon's finger.

5. The finger-guided surgical instrument of claim 1, wherein said mechanism further serves for withdrawing said ejectable surgical tool back into said housing.

09372578.081299

6. The finger-guided surgical instrument of claim 1, wherein said wall is a side wall of said thimble-like element.

7. The finger-guided surgical instrument of claim 1, wherein said wall is a front wall of said thimble-like element.

8. The finger-guided surgical instrument of claim 1, wherein said thimble-like element is constructed so as to be mounted over a dorsal side of the distal phalanx of the surgeon's finger, thereby exposing the entire ventral tactile portions of the distal phalanx.

9. The finger-guided surgical instrument of claim 1, wherein said thimble-like element is constructed so as to fully surround the distal phalanx and expose the tip of the ventral tactile portion of the distal phalanx.

10. The finger-guided surgical instrument of claim 1, wherein said thimble-like element is constructed so as to be mounted over a

09372578.081299

ventral side of the distal phalanx of the surgeon's finger and expose the tip of the ventral tactile portion of the distal phalanx.

11. The finger-guided surgical instrument of claim 1, wherein said surgical tool is ejectable in a direction generally in extension of a longitudinal axis of said thimble like element.

12. The finger-guided surgical instrument of claim 1, wherein said surgical tool is ejectable in a circular path.

13. The finger-guided surgical instrument of claim 12, wherein said circular path on a plane which substantially parallels a plane traversing the surgeon's finger from top to bottom

14. The finger-guided surgical instrument of claim 12, wherein said circular path on a plane which substantially parallels a plane traversing the surgeon's finger from side to side.

09372578.081299

15. The finger-guided surgical instrument of claim 12, wherein said circular path on a plane which is substantially perpendicular to the longitudinal axis of the surgeon's finger.

16. The finger-guided surgical instrument of claim 1, wherein said surgical tool is selected from the group consisting of a surgical needle, a needle carrying a surgical anchor ejectable therefrom, a puncturing device, an injection needle, a capillary, a puncturing capillary, a miniaturized surgical grasper, miniaturized surgical scissors, a miniaturized blade and an aspiration capillary.

18. The finger-guided surgical instrument of claim 1, further comprising a reporting mechanism for reporting at least one situation selected from the group consisting of a full ejection of said surgical tool, a full withdrawal of said surgical tool, a degree of ejection of said surgical tool and a degree of withdrawal of said surgical tool.

19. The finger-guided surgical instrument of claim 1, further comprising an optical head engaged by said thimble like element.

09372578.081299

20. A finger-guided surgical instrument, comprising:
- (a) a thimble-like element being adapted to surround a portion of a surgeon's finger while exposing the ventral tactile portions of the distal phalanx thereof, so as to enable the surgeon to tactile sense a body location to be treated;
  - (b) an ejectable substantially semi-circular surgical needle being engaged within a housing being formed within, or connected to, a wall of said thimble-like element, said surgical needle being for holding and guiding a suture; and
  - (c) ~~a mechanism for ejecting said surgical needle in a circular~~ path through an ejection opening in said housing from said thimble-like element and thereafter withdrawing said surgical needle back into said thimble-like element through a withdrawal opening in said housing, so as to enable the surgeon to suture said body location..

21. The finger-guided surgical instrument of claim 20, further comprising a suture attached at one end thereof to said substantially semi-circular surgical needle.

09372578.001299

22. The finger-guided surgical instrument of claim 20, wherein said mechanism includes a substantially semi-circular channel formed in said housing and connecting said ejection and withdrawal openings and which fully engages said substantially semi-circular surgical needle before its ejection and following its withdrawal, so as to direct said substantially semi-circular surgical needle in said circular path around a virtual axis, said mechanism further includes a remotely treated rotating arm being in said housing and rotatable about a hinge, said rotating arm is designed to eject said substantially semi-circular surgical needle through said ejection opening by pushing a rear portion of said substantially semi-circular surgical needle and said rotating arm is further designed to withdraw said substantially semi-circular surgical needle through said withdrawal opening by pulling a front portion of said substantially semi-circular surgical needle.

23. The finger-guided surgical instrument of claim 22, wherein said virtual axis and said hinge are co-positioned.

09372578.081299

24 The finger-guided surgical instrument of claim 22, wherein said virtual axis and said hinge are offset, whereas said rotating arm is an extendible-retractable arm.

25. The finger-guided surgical instrument of claim 22, wherein said substantially semi-circular surgical needle is formed with a notch at said front portion, said notch is designed to accept a distal end of said rotating arm.

26. The finger-guided surgical instrument of claim 22, wherein said substantially semi-circular surgical needle is formed with a notch at said rear portion, said notch is designed to accept a distal end of said rotating arm.

26. The finger-guided surgical instrument of claim 22, wherein said substantially semi-circular surgical needle is formed with a blunt rear end, said rear end is designed to be pushed by said rotating arm.

09372578-081299



27. The finger-guided surgical instrument of claim 20, wherein said wall is a side wall of said thimble-like element.

28. The finger-guided surgical instrument of claim 20, wherein said wall is a front wall of said thimble-like element.

29. The finger-guided surgical instrument of claim 22, wherein said remotely treated rotating arm includes a rotating wheel portion rotatable about said hinge and an arm portion connected to, or integrally formed with, said rotating wheel portion, said mechanism further includes a remote rotation relay for relaying rotary motion from a remote rotatable actuator to said rotating wheel for effecting rotation of said rotating arm.

30. The finger-guided surgical instrument of claim 29, further comprising a flexible tube connecting between said housing and said remote rotatable actuator, said tube engaging said remote rotation relay.

09372578.081299

31. The finger-guided surgical instrument of claim 20, wherein said thimble-like element is constructed so as to be mounted over a dorsal side of the distal phalanx of the surgeon's finger, thereby exposing the entire ventral tactile portions of the distal phalanx.

32. The finger-guided surgical instrument of claim 20, wherein said circular path on a plane which substantially parallels a plane traversing the surgeon's finger from top to bottom.

33. The finger-guided surgical instrument of claim 20, wherein said circular path on a plane which substantially parallels a plane traversing the surgeon's finger from side to side.

34. The finger-guided surgical instrument of claim 20, wherein said circular path on a plane which is substantially perpendicular to the longitudinal axis of the surgeon's finger.

35. The finger-guided surgical instrument of claim 20, further comprising a reporting mechanism for reporting at least one situation

09372578.081299

selected from the group consisting of a full ejection of said substantially semi-circular surgical needle, a full withdrawal of said substantially semi-circular surgical needle, a degree of ejection of said substantially semi-circular surgical needle and a degree of withdrawal of said substantially semi-circular surgical needle.

36 The finger-guided surgical instrument of claim 20, further comprising an optical head engaged by said thimble like element.

37. A finger-guided surgical instrument, comprising:

- (a) a thimble-like element being adapted to surround at least a portion of a surgeon's finger while at least partially exposing the ventral tactile portions of the distal phalanx thereof, so as to enable the surgeon to tactile sense a body location to be treated;
- (b) an ejectable capillary being engaged within a housing being formed in a wall of said thimble-like element; and

09372578.021299

- (c) a first mechanism for ejecting said ejectable capillary from said thimble-like element, so as to enable the surgeon to capillary sample said body location.

38. The finger-guided surgical instrument of claim 37, further comprising:

- (d) a translatably ejectable sleeve being engaged within said housing surrounding said ejectable capillary; and
- (e) a second mechanism for ejecting said translatably ejectable sleeve from said thimble-like element, so as to shield said body location from surrounding body fluids.

39. The finger-guided surgical instrument of claim 37, further comprising:

- (d) an ejectable puncturing device being engaged within said housing, said first mechanism further serves for ejecting said ejectable puncturing device from said thimble-like element, so as to enable the surgeon to wound said body location.

09372578.081299

41. The finger-guided surgical instrument of claim 37, wherein said ejectable capillary has sharp edges so as to enable the surgeon to wound said body location.

42. The finger-guided surgical instrument of claim 37, wherein said ejectable capillary is a translatable ejectable capillary, whereas said first mechanism in a remotely treated translatable ejection mechanism.

43. The finger-guided surgical instrument of claim 37, wherein ~~said ejectable capillary is a rotatably-translatably ejectable capillary,~~ whereas said first mechanism in a rotatable-remotely treated translatable ejection mechanism.

44. The finger-guided surgical instrument of claim 37, wherein said ejectable capillary is an ejectable aspiration capillary, the finger-guided surgical instrument further comprising a remote aspirating device being in fluid communication with said ejectable aspiration capillary.

09372578.081299

45. The finger-guided surgical instrument of claim 37, wherein said first mechanism further serves for withdrawing said ejectable capillary back into said housing

46 The finger-guided surgical instrument of claim 37, wherein said wall is a back wall of said thimble-like element.

47. The finger-guided surgical instrument of claim 37, wherein said thimble-like element is constructed so as to be mounted over a ~~ventral side of the distal phalanx of the surgeon's finger, thereby~~ exposing the tip of the ventral tactile portion of the distal phalanx, underneath the nail.

48. The finger-guided surgical instrument of claim 37, wherein said capillary is ejectable in a direction generally in extension of a longitudinal axis of said thimble like element.

49 The finger-guided surgical instrument of claim 37, further comprising a reporting mechanism for reporting at least one situation

09372578.081299

selected from the group consisting of a full ejection of said capillary, a full withdrawal of said capillary, a degree of ejection of said capillary and a degree of withdrawal of said capillary.

50. The finger-guided surgical instrument of claim 37, further comprising an optical head engaged by said thimble like element.

51. The finger-guided surgical instrument of claim 37, further comprising a reporting mechanism in said capillary for reporting to the surgeon of at least one situation selected from the group consisting of a presence of fluid in said capillary and a level of fluid in said capillary.

52. A finger-guided surgical instrument, comprising:

- (a) a thimble-like element being adapted to surround at least a portion of a surgeon's finger while at least partially exposing the ventral tactile portions of the distal phalanx thereof, so as to enable the surgeon to tactile sense a body location to be treated;

09372578.081299

(b) at least one ejectable anchor guiding element being engaged within at least one housing being formed within, or connected to, at least one wall of said thimble-like element;

(c) at least one first mechanism for ejecting said at least one anchor guiding element from said thimble-like element, so as to penetrate said body location;

(d) at least one ejectable anchor being engaged within said at least one ejectable anchor guiding element; and

(e) at least one second mechanism for ejecting said at least one ~~ejectable anchor from within said at least one ejectable~~ anchor guiding element, so as to enable the surgeon to anchor said at least one ejectable anchor in said body location

53. The finger-guided surgical instrument of claim 52, further comprising at least one cord attached to said at least one anchor.

54. The finger-guided surgical instrument of claim 53, wherein said at least one cord is attached to said at least one anchor at a position

09372578.081299



so as to effect rotation and therefore efficient anchorage of said anchor when anchored in said body location by pulling on said cord.

55. The finger-guided surgical instrument of claim 52, wherein said at least one first mechanism includes at least one remotely treated rotating arm being in said housing and rotatable about a hinge, said at least one remotely treated rotating arm is designed to eject said at least one ejectable anchor guiding element through at least one ejection opening in said at least one housing by pushing a rear portion of said at least one ~~ejectable anchor guiding element, said at least one remotely treated~~ rotating arm is further designed to withdraw said at least one ejectable anchor guiding element by pulling said rear portion of said at least one ejectable anchor guiding element in a reverse direction.

56. The finger-guided surgical instrument of claim 52, wherein said at least one second mechanism includes at least one remotely treated translatable ejection mechanism for ejecting said at least one anchor from said at least one ejectable anchor guiding element.

09372578.081299

57. The finger-guided surgical instrument of claim 52, wherein said at least one wall is at least one side wall of said thimble-like element.

58. The finger-guided surgical instrument of claim 52, wherein said thimble-like element is constructed so as to be mounted over a dorsal side of the distal phalanx of the surgeon's finger, thereby exposing the entire ventral tactile portions of the distal phalanx.

59. The finger-guided surgical instrument of claim 52, further comprising a reporting mechanism for reporting at least one situation selected from the group consisting of a full ejection of said at least one ejectable anchor, a full ejection of said at least one ejectable anchor guiding element, a full withdrawal of said at least one ejectable anchor guiding element, a degree of ejection of said at least one ejectable anchor guiding element and a degree of withdrawal of said at least one ejectable anchor guiding element.

09372578.081299

60. The finger-guided surgical instrument of claim 52, further comprising an optical head engaged by said thimble like element.

61. A finger-mounted device for guiding a surgical instrument, the device comprising a thimble-like element being adapted to surround at least a portion of a surgeon's finger while at least partially exposing the ventral tactile portions of the distal phalanx thereof, so as to enable the surgeon to tactile sense a body location to be treated, said thimble-like element being formed with at least one longitudinal guiding tunnel formed within a wall thereof, said at least one longitudinal guiding tunnel being for guiding the surgical instrument therethrough, so as to enable the surgeon to operate said body location.

62. The finger-mounted device of claim 61, further comprising an adapter insertable between said thimble-like element and the surgeon's finger, so as to adapt the guided surgical instrument to fingers of different size.

09372578.081299

63. The finger-mounted device of claim 61, wherein said wall is a side wall of said thimble-like element.

64. The finger-mounted device of claim 61, wherein said wall is a front wall of said thimble-like element.

65. The finger-mounted device of claim 61, wherein said wall is a front wall of said thimble-like element.

66. The finger-mounted device of claim 61, wherein said thimble-like element is constructed so as to be mounted over a dorsal side of the distal phalanx of the surgeon's finger, thereby exposing the entire ventral tactile portions of the distal phalanx.

67. The finger-mounted device of claim 61, wherein said thimble-like element is constructed so as to fully surround the distal phalanx and expose the tip of the ventral tactile portion of the distal phalanx.

09372570.081299

68. The finger-mounted device of claim 61, wherein said thimble-like element is constructed so as to be mounted over a ventral side of the distal phalanx of the surgeon's finger and expose the tip of the ventral tactile portion of the distal phalanx.

69. The finger-mounted device of claim 61, wherein said surgical tool is ejectable in a direction generally in extension of a longitudinal axis of said thimble like element.

~~70. The finger-mounted device of claim 61, wherein said~~  
surgical tool is selected from the group consisting of a surgical needle, a needle carrying a surgical anchor ejectable therefrom, a puncturing device, an injection needle, a capillary, a puncturing capillary, a miniaturized surgical grasper, miniaturized surgical scissors, a miniaturized blade and an aspiration capillary.

71 The finger-mounted device of claim 61, further comprising an optical head engaged by said thimble like element.

00372578.001299

72. A finger-guided suturing device, comprising:

(a) a housing in the form of a body provided with a bore, the

surface of which is substantially a surface of rotation, said

housing being cut along a plane radially offset from an axial plane of said bore by such a distance as to cause the remaining bore to subtend an angle of more than  $180^0$ ;

(b) a thimble-like member adapted to partially surround, and fit with friction, a surgeon's finger while at least partially exposing the ventral portion of the distal phalanx thereof,

~~said thimble-like member being movable within said~~

housing with one degree of freedom in at least rotation;

(c) a surgical needle of substantially semi-circular shape, one end of which constitutes the active point thereof and to the other end of which is fixedly attachable one end of a surgical suture, said needle being adapted to guidedly move in a first guide means of said housing and being further provided with a notch at a location close to said active point;

09372578.081299

(d) a ratchet member with arcuately arranged teeth, fixedly attached to, or integral with, said thimble-like member,

(e) a needle pusher adapted to guidedly move in a second guide means of said housing and being provided with an elastically deformable pawl member, whereby said needle pusher is mechanically coupled to said ratchet member when the latter rotates in one sense of rotation, and

(f) a needle puller adapted to guidedly move in said second guide means of said housing and being provided with an elastically deformable pawl member, whereby said needle puller is mechanically coupled to said ratchet member when the latter rotates in said one sense of rotation, further comprising a tooth-like projection for engaging said notch in said needle to facilitate its pulling.

73. The suturing device of claim 72, wherein said housing is substantially in the shape of a hollow cylinder, part of which has been cut away along a plane radially offset from an axial plane of said cylinder by

09372578-081299

such a distance as to cause the remaining cylindrical portion to subtend an angle of more than  $180^\circ$ .

74. The suturing device of claim 72, wherein said first guide means is a first peripheral groove on said housing.

75. The suturing device of claim 72, wherein said guide means is a second peripheral groove on said housing.

76. ~~The suturing device of claim 72, further comprising a cap~~ contiguously mounted on, and substantially complementing the outer shape of, said housing, the cylindrical inside surface of said cap defining and delimiting the space inside which said needle pusher and said needle puller can move.

77. The suturing device of claim 72, wherein said thimble-like member is provided with at least one projection matching a peripheral groove inside and housing, whereby said member is constrained to one degree of freedom in rotation only.

00372578.001299



78. The device of claim 77, wherein, in addition to said peripheral inside groove, said housing is also provided with at least one axially directed inside groove, crossing and extending beyond said peripheral groove, whereby, in at least one angular position relative to said housing, said thimble-like member is also capable of a translational movement against the restoring force of a spring.

79. The suturing device of claim 72, further comprising an exit guide for said needle, mounted at the location where the active point of said needle emerges from said device upon commencement of the suturing process.

80. The suturing device of claim 72, further comprising an entrance guide mounted at the location where the active point of said needle re-enters said device at the conclusion of the suturing process.

81. A finger-guided suturing device, comprising a substantially prismatic housing having a bore, at least part of the length of which is

09372578-081299

tapering and adapted to partially surround and fit a surgeon's finger with friction while at least partly exposing the ventral portion of the distal phalanx thereof, said housing being cut along a plane distant from the axis of said bore so that said bore is exposed, but still surrounds the surgeon's finger over more than 180°, said device further comprising on each side of said prismatic housing:

- (a) a recess having a central hole; and
- (b) two surgical needles of a substantially semi-circular shape, one end of each needle constituting the active point thereof and the other end thereof being fixedly attachable to one end of a surgical suture, said needles being adapted to guidedly move in a groove provided in said recess, each being further provided with a notch at a location close to said active point, and needle moving means rotatably mounted in each of said recesses and being rotatable in one sense of rotation by actuating first needle-manipulating means, and in the opposite sense of rotation by actuating second needle-manipulating means.

09372578.081299

82. The suturing device of claim 81, wherein said needle-manipulating means are cord means actuated by pulling.

83. The suturing device of claim 81, wherein said needle moving means comprises needle pusher means advanced by pulling said first cord means and reversed by pulling said second cord means, and needle puller means adapted to guidedly move in said housing recesses, each comprising catch means for engaging said notch in said needle, as well as pawl means fixedly connected to or integral with said needle puller means, to engage said needle pusher means to effect the return of said needles into said housing.

84. The suturing device of claim 83, wherein said needle pusher means and said needle puller means are one and the same component.

85. The suturing device of claim 83, wherein said pawl means is fixedly connected to or integrated with said needle pusher means.

09372578-08199

86. The suturing device of claim 81, wherein said needle drivers are each provided with drum means, said first cord means being wound on each of said drums in one sense of winding, and said second cord means being wound on each of said drums in the opposite sense of winding.

87. The suturing device of claim 81, wherein said catch means is in the form of a tooth-like projection.

88. ~~A surgical procedure for bladder-neck suspension for~~  
treatment of urinary incontinence, the procedure comprising the step of suspending a pelvic fascia and a vaginal wall lateral to a urethra of a patient to Cooper's ligament by sutures being placed using a finger-guided surgical instrument having an ejectable, substantially semi-circular needle.

89. A surgical procedure for treatment of recurrent shoulder dislocations, the procedure comprising the step of anchoring at least one anchor holding a cord to a glenoid rim of a patient and engaging a torn

09372578.081299

11:

anterior-inferior or anterior-medial labrum thereto using said cord, wherein said at least one anchor is anchored in the glenoid rim via an anchor implanting device having at least one ejectable anchor guiding element engaging at least one ejectable anchor therein.

90. A surgical procedure for sampling blood from a fetus scalp during labor, the procedure comprising the step of sampling said blood into an ejectable capillary of a finger guided capillary device.

91. ~~A surgical procedure for treatment of rectal prolaps, the~~ procedure comprising the step of constricting an anal opening by sutures being applied by using a finger-guided surgical instrument having an ejectable, substantially semi-circular needle.

92. A surgical procedure for treatment of esophageal reflux, the procedure comprising the step of positioning a vessel loop around a esophagus of a patient using a finger-guided surgical instrument having an ejectable, substantially semi-circular needle.

09372578.081299

93. A surgical procedure for treatment of vaginal prolapse, the procedure comprising the step of tying an upper part of a vagina of a patient to a sacrospinous ligament of the patient by sutures being placed using a finger-guided surgical instrument having an ejectable, substantially semi-circular needle.

94. A surgical procedure for treatment of rupture of a rectum in large animals, the procedure comprising the step of suturing the rupture using a finger-guided surgical instrument having an ejectable, substantially semi-circular needle.

95. A surgical procedure for treatment of rupture of a cervix in large animals, the procedure comprising the step of suturing the rupture using a finger-guided surgical instrument having an ejectable, substantially semi-circular needle.

96. A surgical procedure for treatment of rupture of a uterus in large animals, the procedure comprising the step of suturing the rupture

09372578.081299

using a finger-guided surgical instrument having an ejectable,  
substantially semi-circular needle.

09372578-081299

## ABSTRACT OF THE DISCLOSURE

A finger-guided surgical instrument is described and includes (a) a thimble-like element being adapted to surround at least a portion of a surgeon's finger while at least partially exposing the ventral tactile portions of the distal phalanx thereof, so as to enable the surgeon to tactile sense a body location to be treated; (b) an ejectable surgical tool being engaged within a housing being formed within, or connected to, a wall of the thimble-like element; and (c) a mechanism for ejecting the surgical tool from the thimble-like element, so as to enable the surgeon to operate the body location.

09372578-081299



## SMALL BUSINESS CONCERN - NEW APPLICATION

Attorney Docket No.: 1679/3

## IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

In RE Application of: GILLEVY ET AL.

Filed Concurrently Herewith

For: FINGER GUIDED SURGICAL INSTRUMENTVERIFIED STATEMENT UNDER 37 CFR 1.27  
CLAIMING STATUS AS A SMALL ENTITY

To The Commissioner of Patents and Trademarks:

I hereby declare that:

I am the owner of, or an official empowered to act on behalf of, the small business concern identified below

Name of Concern: UROGYN LTD.Address: CEAKIM INNOVATIVE TECHNOLOGIES, P. O. BOX 233, 30300, OFAKIM, ISRAEL

The small business concern identified above, together with its affiliates, employs fewer than 500 persons and qualifies as a small business concern as defined in 37 CFR 1.9(d) for purposes of paying reduced fees under 35 USC § 41(a) and § 41(b) to the Patent and Trademark Office with regard to the above-entitled invention described in the specification filed herewith.

Rights under contract or law have been conveyed to and remain with the small business concern identified above with regard to the above entitled invention.

If the rights held by the small business concern are not exclusive, each other party having rights to the invention is listed below, and no rights to the invention are held by any party who could not qualify as a small entity under 37 CFR 1.9(f), namely any person who could not be classified as an independent inventor under 37 CFR 1.9(c) if that person had made the invention, or any concern which would not qualify as a small business concern under 37 CFR 1.9(d) or a nonprofit organization under 37 CFR 1.9(e).

Full Name (Party 1) : NONE

Address : \_\_\_\_\_

Status : ☐ Individual☐ Small Business  
Concern☐ Nonprofit  
Organization

Full Name (Party 2) : \_\_\_\_\_

Address : \_\_\_\_\_

Status : ☐ Individual☐ Small Business  
Concern☐ Nonprofit  
Organization

I acknowledge the duty under 37 CFR 1.28(b) to file, in this application, notification of any change in status resulting in loss of entitlement to small entity status prior to paying, or at the time of paying, the issue fee due after the date on which status as a small entity is no longer appropriate.

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true, and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment or both, under Section 1001 of Title 18 of the United States Code, and that such willful false statements may jeopardize the validity of the application and any patent issuing thereon.

Name of Person Signing

Signature

Date

Capacity of Person Signing

Address of Person Signing

09372570-081299

## SMALL BUSINESS CONCERN - NEW APPLICATION

Attorney Docket No. 1678/3

## IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

In RE Applicant of GILLEVY ET AL.

Filed Concurrently Herewith

For: FINGER GUIDED SURGICAL INSTRUMENTVERIFIED STATEMENT UNDER 37 CFR 1.27  
CLAIMING STATUS AS A SMALL ENTITY

To The Commissioner of Patents and Trademarks:

I hereby declare that:

I am the owner of, or an official empowered to act on behalf of, the small business concern identified below:

Name of Concern UROGYNE LTD.Address : OFAKIM INNOVATIVE TECHNOLOGIES, P. O. BOX 633, 80300 OFAKIM, ISRAEL

The small business concern identified above, together with its affiliates, employs fewer than 500 persons and qualifies as a small business concern as defined in 37 CFR 1.9(d) for purposes of paying reduced fees under 35 USC § 41(a) and § 41(b) to the Patent and Trademark Office with regard to the above-entitled invention described in the specification filed herewith.

Rights under contract or law have been conveyed to and remain with the small business concern identified above with regard to the above entitled invention.

If the rights held by the small business concern are not exclusive, each other party having rights to the invention is listed below, and no rights to the invention are held by any party who could not qualify as a small entity under 37 CFR 1.9(f), namely any person who could not be classified as an independent inventor under 37 CFR 1.9(e) if that person had made the invention; or any concern which would not qualify as a small business concern under 37 CFR 1.9(d) or a nonprofit organization under 37 CFR 1.9(e).

Full Name (Party 1) : NONE

Address : \_\_\_\_\_

Status ☐ Individual ☐ Small Business Concern ☐ Nonprofit Organization

Full Name (Party 2) : \_\_\_\_\_

Address : \_\_\_\_\_

Status ☐ Individual ☐ Small Business Concern ☐ Nonprofit Organization

I acknowledge the duty under 37 CFR 1.28(b) to file, in this application, notification of any change in status resulting in loss of entitlement to small entity status prior to paying, or at the time of paying, the issue fee due after the date on which status as a small entity is no longer appropriate.

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true, and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code, and that such willful false statements may jeopardize the validity of the application and any patent issuing thereon.

Name of Person Signing \_\_\_\_\_

Signature \_\_\_\_\_

Date \_\_\_\_\_

Capacity of Person Signing \_\_\_\_\_

Address of Person Signing \_\_\_\_\_

09372578-001299

Attorney Docket: 16792  
page 1 of 2

Combined Declaration For Patent Application and Power of Attorney

As a below named inventor, I hereby declare that:

My residence, post office address and citizenship are as stated below next to my name;  
I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled FINGER GUIDED SURGICAL INSTRUMENT, the specification of which

(check one) ☒ is attached hereto.

☐ was filed on \_\_\_\_\_ as Application Serial No. \_\_\_\_\_ and was amended on \_\_\_\_\_. I hereby state that I have reviewed and understand the contents of the above identified specification, including the claims, as amended by any amendment referred to above.

I acknowledge the duty to disclose information which is material to the patentability of this application in accordance with Title 37, Code of Federal Regulations, § 1.56(a).

I hereby claim foreign priority benefits under Title 35, United States Code, § 119 of any foreign application(s) for patent or inventor's certificate listed below and have also identified below any foreign application for patent or inventor's certificate having filing date before that of the application on which priority is claimed:

Prior Foreign Application(s)			Priority Claimed	
<u>IL 99/00084</u>	<u>PCT</u>	<u>9 FEB 1999</u>	<input checked="" type="checkbox"/> Yes	<input type="checkbox"/> No
(number)	(Country)	(Day, Month, Year Filed)		
<u>123275</u>	<u>IL</u>	<u>12 FEB 1998</u>	<input checked="" type="checkbox"/> Yes	<input type="checkbox"/> No
(number)	(Country)	(Day, Month, Year Filed)		
_____	_____	_____	<input type="checkbox"/> Yes	<input type="checkbox"/> No
(number)	(Country)	(Day, Month, Year Filed)		

I hereby claim the benefit under Title 35, United States Code, § 120 of any United States Application(s) listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States application in the manner provided by the first paragraph of Title 35, United States Code, § 112, I acknowledge the duty to disclose material information as defined in Title 37, Code of Federal Regulations, § 1.56(a) which occurred between the filing date of the prior application and the national or PCT international filing date of this application:

(Application Serial No.)	(Filing Date)	Status
_____	_____	(patented, pending, abandoned)

(Application Serial No.)	(Filing Date)	Status
_____	_____	(patented, pending, abandoned)

I hereby appoint the following attorneys, with full power of substitution, association, and revocation, to prosecute this application and to transact all business in the Patent and Trademark Office connected therewith

Mark M. Friedman Registration No. 33,883

Address all Correspondence to:

DR. MARK FRIEDMAN LTD.  
c/o ANTHONY CASTORINA  
2001 JEFFERSON DAVIS HIGHWAY  
SUITE 207  
ARLINGTON, VIRGINIA 22202

Direct all telephone calls & faxes to:  
ROBERT SHEINBEIN  
Phone (703) 415-1581  
Fax (703) 415-4864

09372578.081299

Attorney Docket 16793  
page 2 of 2

## Continuation of Combined Declaration For Patent Application and Power of Attorney

I hereby further declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statement may jeopardize the validity of the application of any patent issued thereon.

*FULL NAME OF SOLE OR FIRST INVENTOR GIL LEVY	INVENTOR'S SIGNATURE	DATE
RESIDENCE 3 AVIGUR, 69375 TEL AVIV, ISRAEL	CITIZENSHIP ISRAELI	
POST OFFICE ADDRESS 3 AVIGUR, 69379 TEL AVIV, ISRAEL		

*FULL NAME OF SECOND INVENTOR MOSHE MAROKO	INVENTOR'S SIGNATURE	DATE
RESIDENCE 16 ARLOZEROV, 45203 HOD HASHARON, ISRAEL	CITIZENSHIP ISRAELI	
POST OFFICE ADDRESS 16 ARLOZEROV, 45203 HOD HASHARON, ISRAEL		



*FULL NAME OF THIRD INVENTOR	INVENTOR'S SIGNATURE	DATE
RESIDENCE	CITIZENSHIP ISRAELI	
POST OFFICE ADDRESS		

*FULL NAME OF FOURTH INVENTOR	INVENTOR'S SIGNATURE	DATE
RESIDENCE	CITIZENSHIP ISRAELI	
POST OFFICE ADDRESS		

*FULL NAME OF FIFTH INVENTOR	INVENTOR'S SIGNATURE	DATE
RESIDENCE	CITIZENSHIP ISRAELI	
POST OFFICE ADDRESS		

*FULL NAME OF SIXTH INVENTOR	INVENTOR'S SIGNATURE	DATE
RESIDENCE	CITIZENSHIP ISRAELI	
POST OFFICE ADDRESS		

09372578.081299

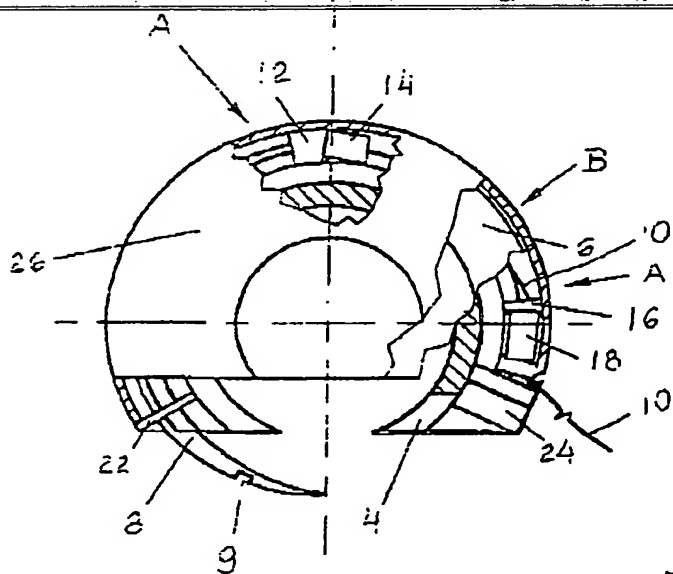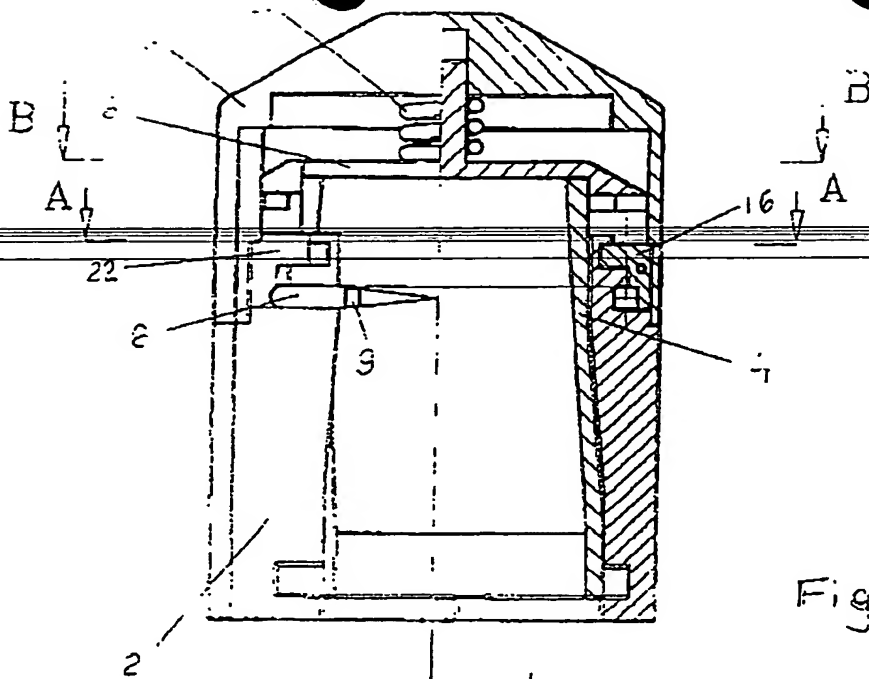

09372578.081299

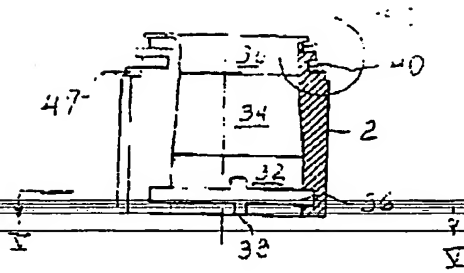


Fig. 3




Fig. 5




Fig. 4

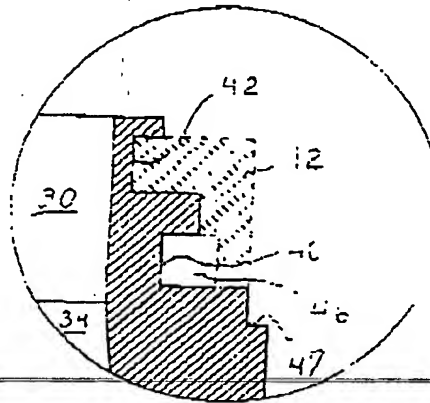


Fig. 6




Fig. 7




Fig. 9




Fig. 10




Fig. 8




Fig. 11

09372578.081299

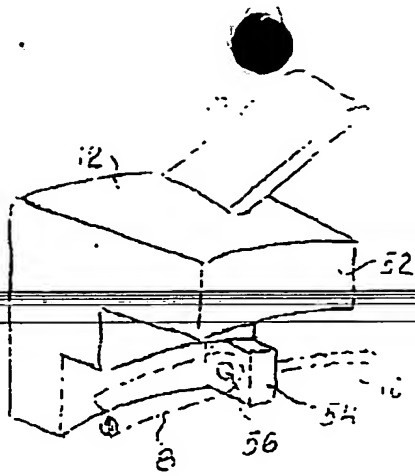


Fig. 12

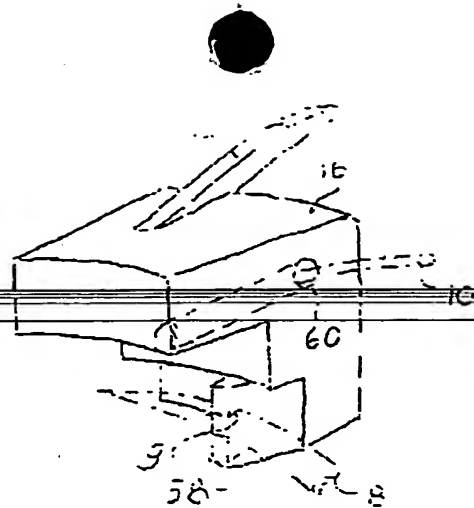


Fig. 13

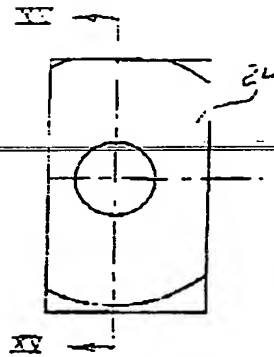


Fig. 14




Fig. 15




Fig. 16




Fig. 17




Fig. 18




Fig. 19

09372578.081299

09372578-081299

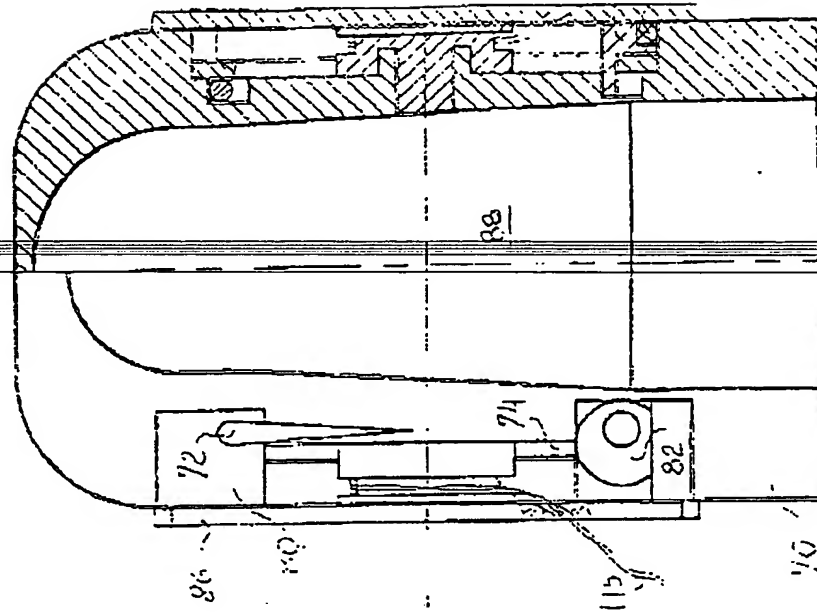


Fig. 20

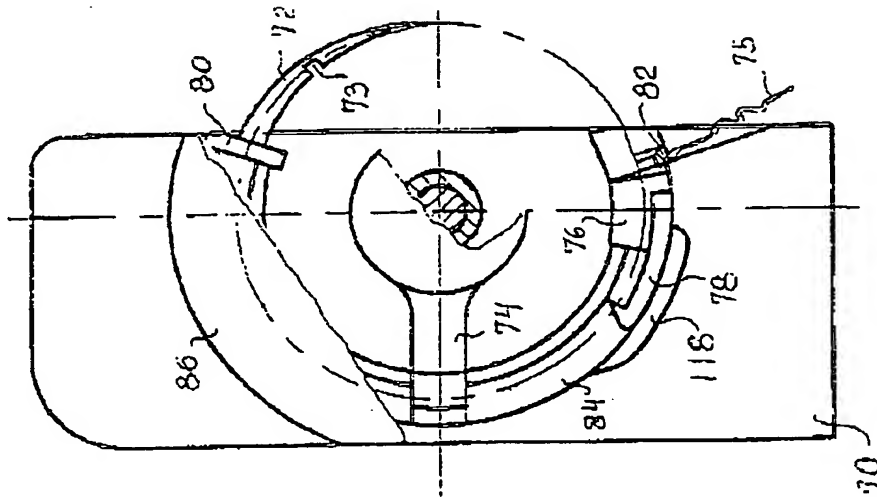


Fig. 21



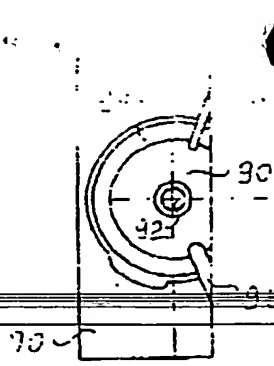


Fig. 34

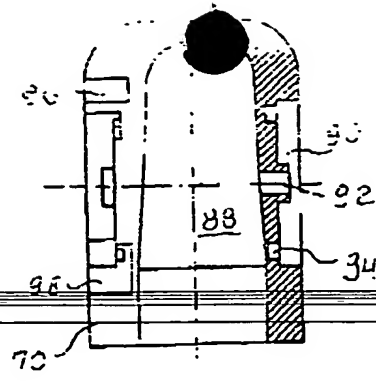


Fig. 22

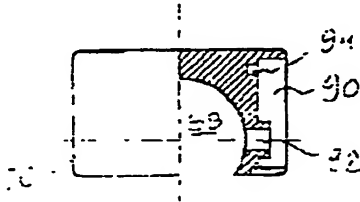


Fig. 23

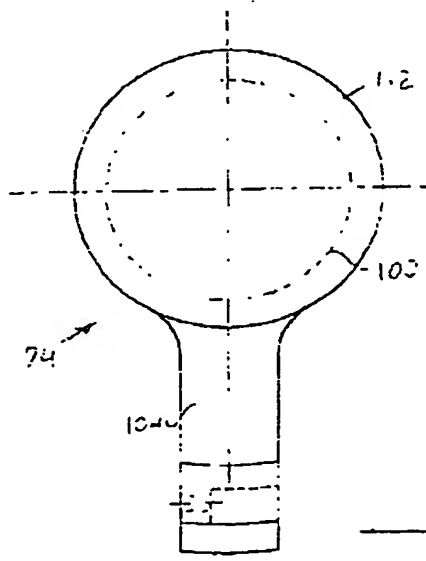


Fig. 25

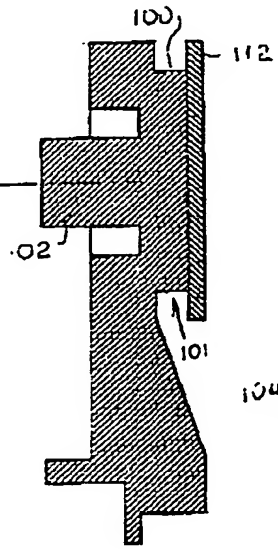


Fig. 26




Fig. 28

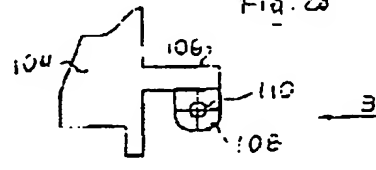


Fig. 27

09372578-081299

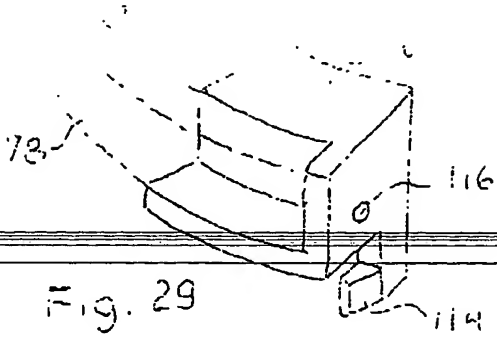


Fig. 29




Fig. 30




Fig. 31

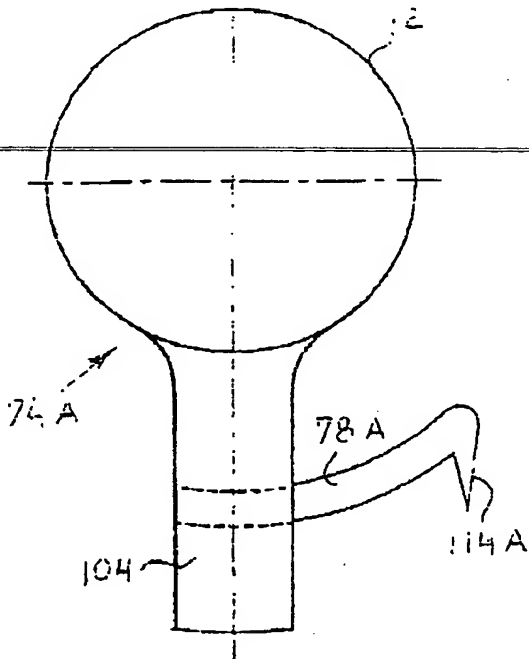


Fig. 33

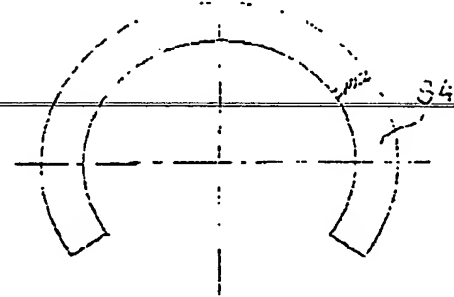


Fig. 32













Fig. 33A

662180-82527560

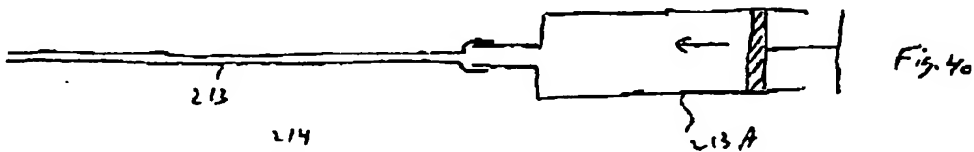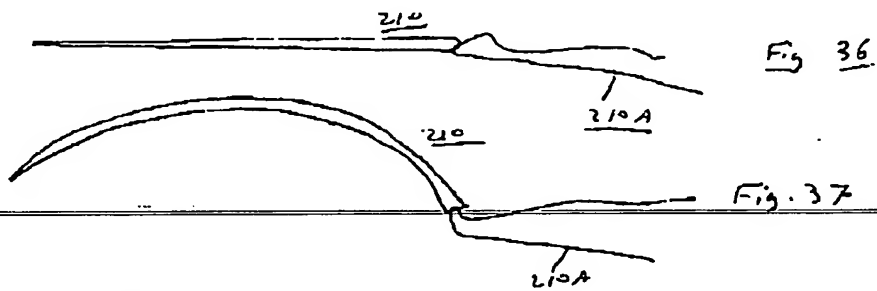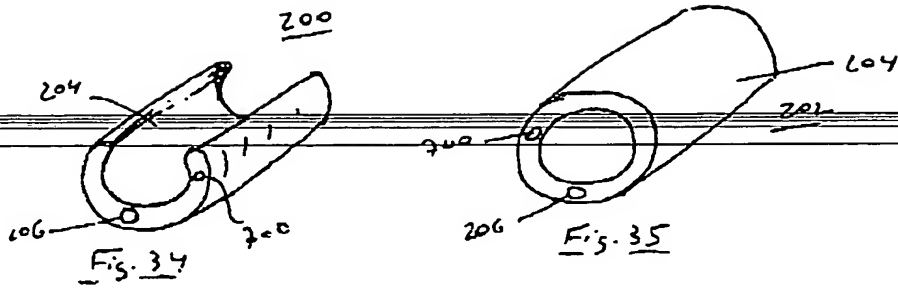




09372578.081299



09372578.081299

**SECRET**

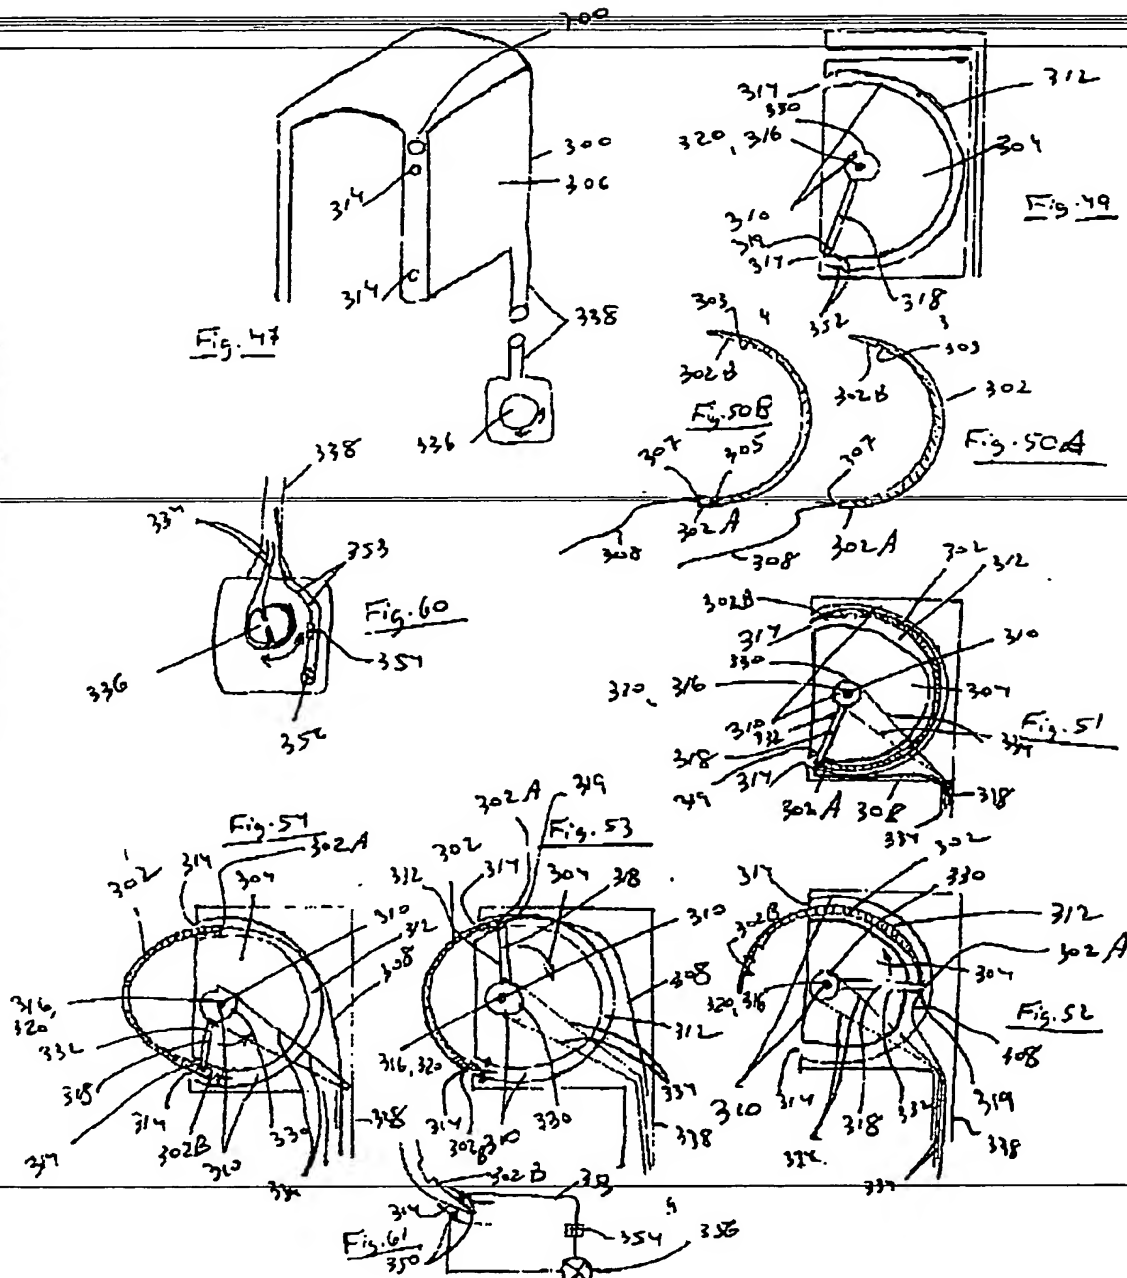

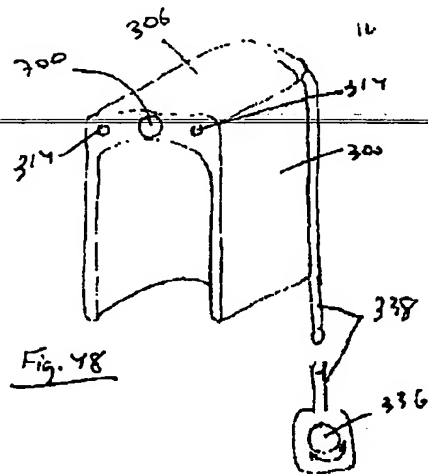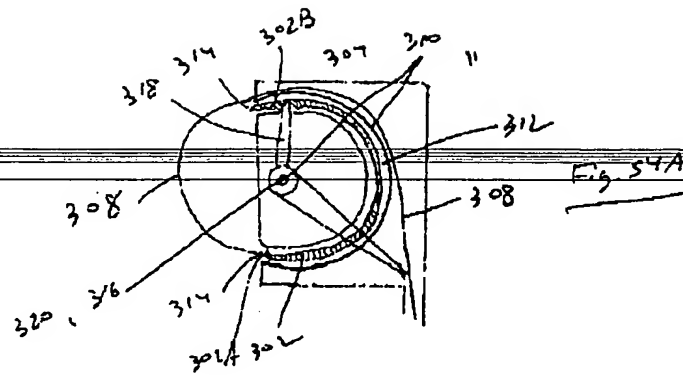

09372578.081299











Fig. 62

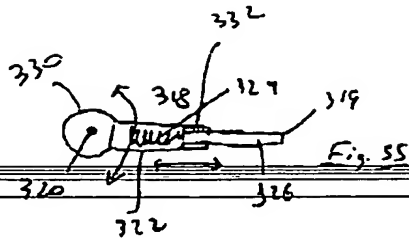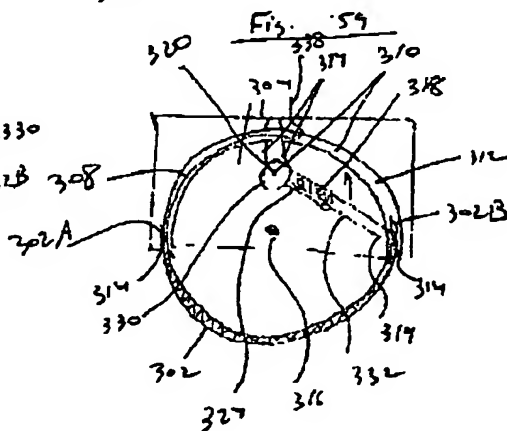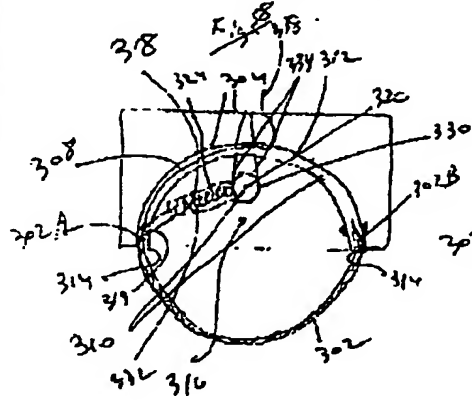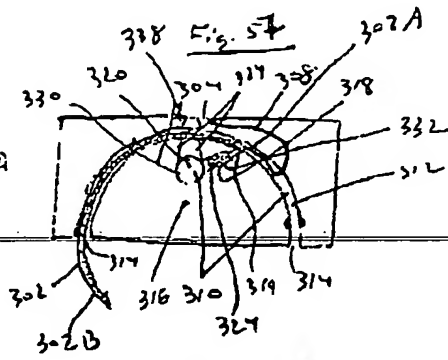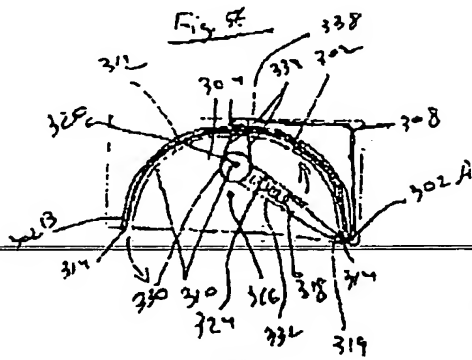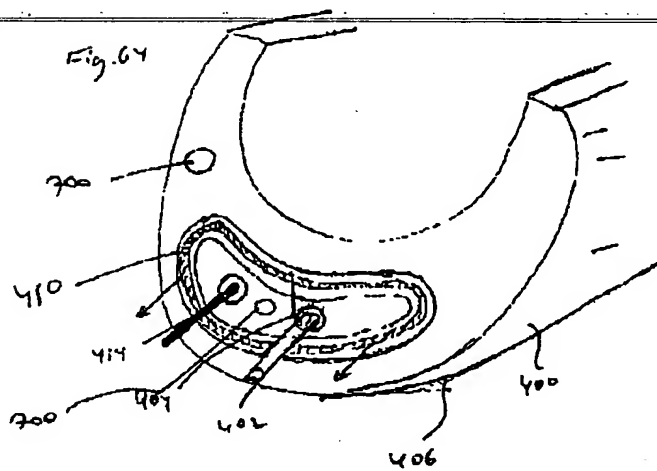


09372570.081299

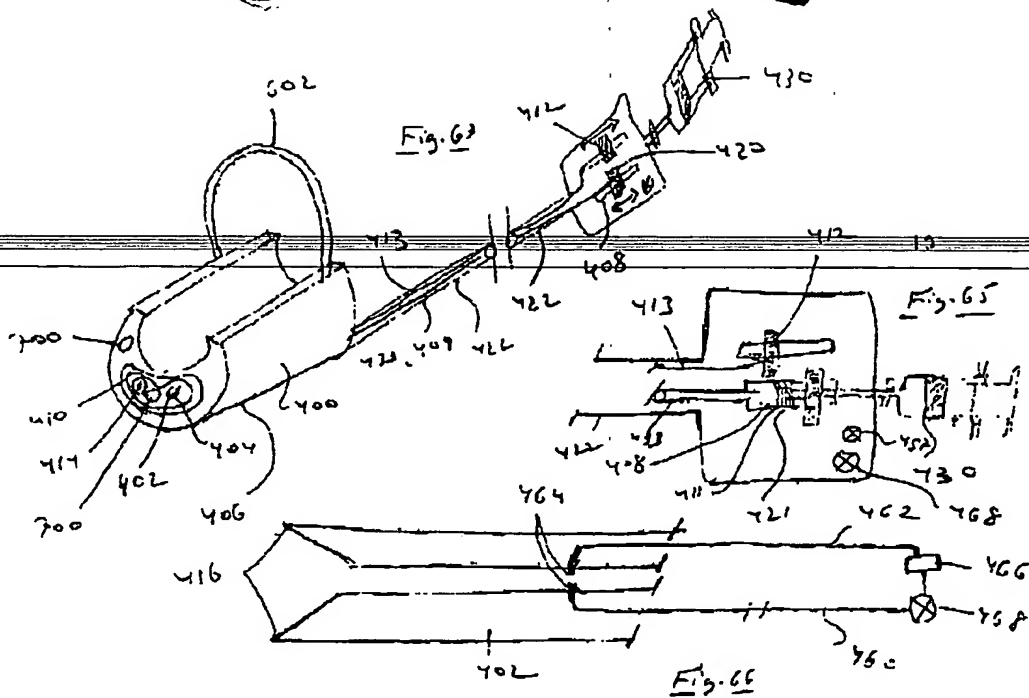

09372578-081299




Fig. 67


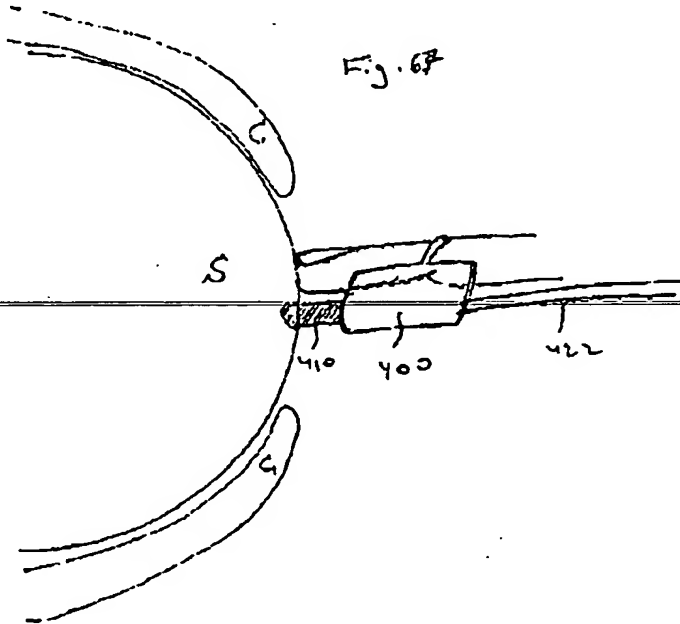


09372578-081299

09372578.081299

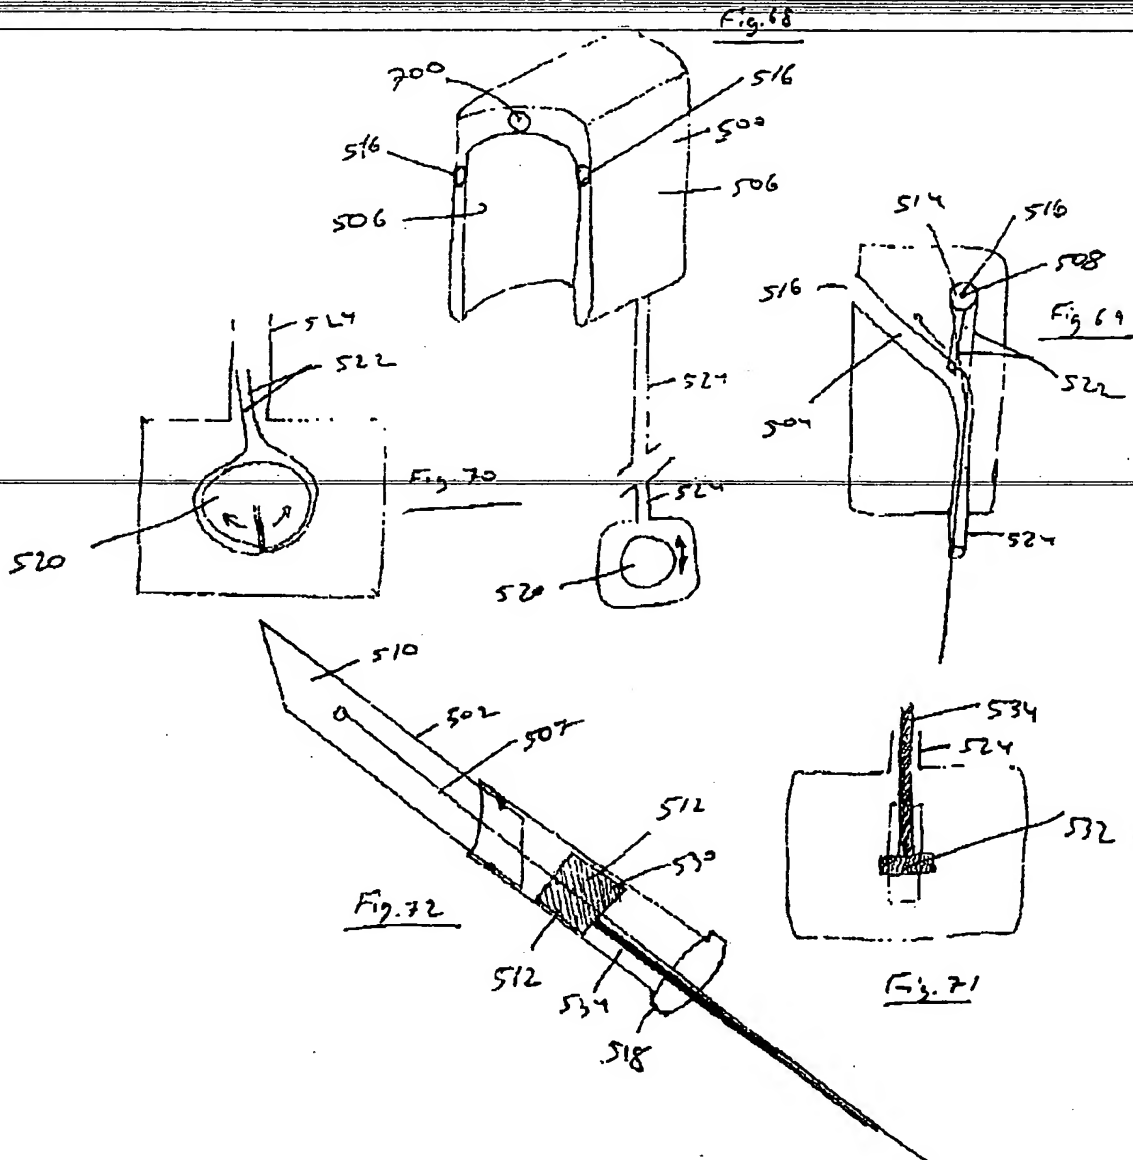

09372578.081299

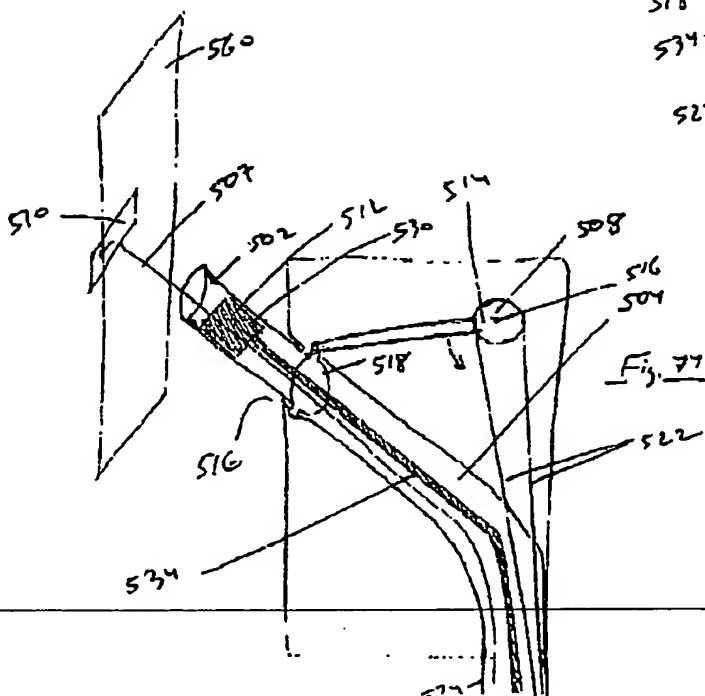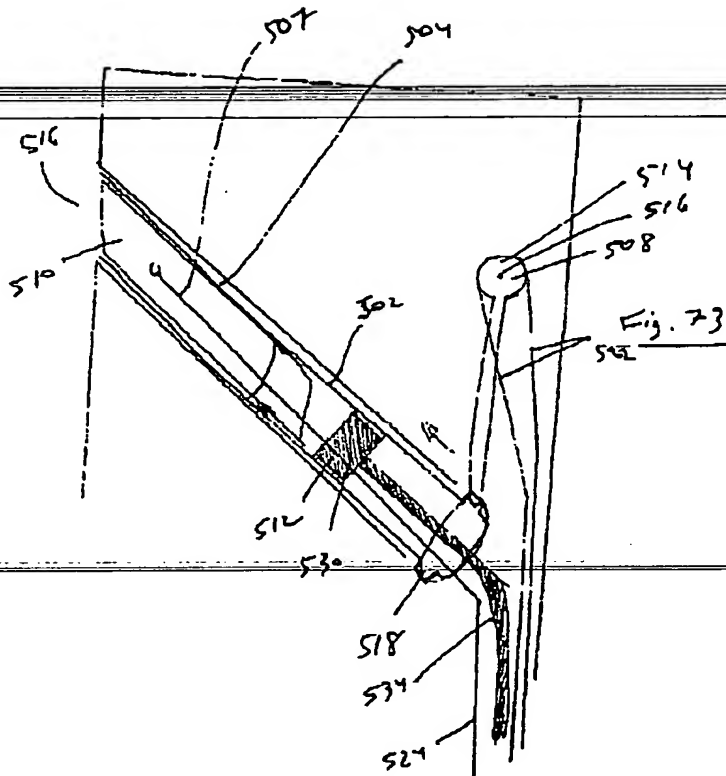

**THIS PAGE BLANK (USPTO)**